


PRODUCT CODE: CM211D-1513D -WH

LED FLUSHMOUNT/11 INCH ROUND PUFF/LOW PROFILE

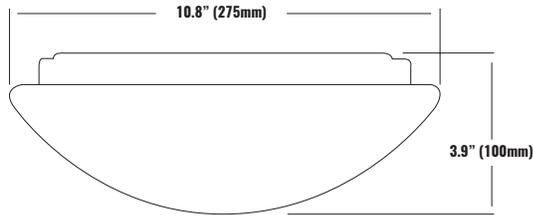

## PRODUCT DESCRIPTION

The Etlin-Daniels CM211D-1513D-WH LED Ceiling Flushmount offers the latest in compact design, even illumination, energy efficiency, and value. This easy to install luminaire features a durable polystyrene lens and is a cost efficient solution to either replace older incandescent or compact fluorescent ceiling fixtures, or for new construction.

Applications include a wide range of residential commercial, hospitality and healthcare facilities. The driver-on-board (DOB) technology is Triac dimmable. Available in 11" and 14" in 3000K & 4000K.

## FEATURES

- LED Indoor Light Source.
- Low profile design.
- Durable polystyrene lens is removable for both installation and maintenance
- Driver-On-Board technology.
- Suitable for damp locations
- Triac Dimmable.
- 5 year warranty
- L70 – 50,000 hours
- Energy Star certified

## PRODUCT SPECIFICATIONS (OPTICAL DATA)

## PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	CRI	SYSTEM EFFICIENCY	VOLTAGE	POWER FREQ.	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
DOB 2835	30 CHIPS	70LM/W	1050LM	3000K	120°	>80CRI	>85%	AC120V	60HZ	>81%	>0.90	<20%

## PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
15W	STEEL/PS	>50,000 HOURS	- 20°C - 45°C - 4°F - 49°F	- 20°C - 45°C - 4°F - 49°F	11 x 3.375 INCHES (279.4 x 85.725 MM)	18.7 X 12.4 X 12.6 INCHES (475 X 315 X 320 MM)



## ADDITIONAL INFORMATION

### INSTALLATION METHOD

FLUSH MOUNT - CEILING MOUNT

### FIXTURE COLOR/DIFFUSER

WHITE POLYSTYRENE

### CONTROL TYPE

TRIAC DIMMABLE


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

**PRODUCT CODE: CM211D-1513D -WH**


**LED FLUSHMOUNT/11 INCH ROUND PUFF/LOW PROFILE**

**LUMINAIRE PHOTOMETRIC (TEST REPORT)**

**ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 834.69LM**

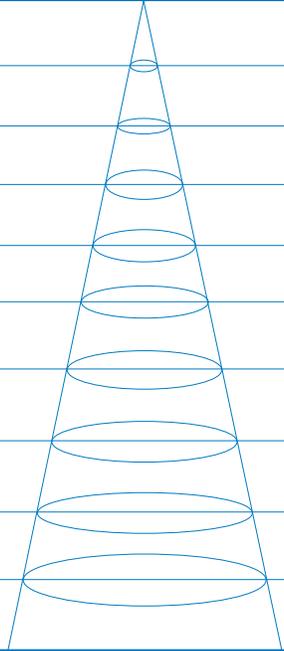3.28FT 1M	58.75/313.35LX		4.25M 14.21 SQ.M
6.56FT 2M	14.69/78.34LX		8.51M 56.83 SQ.M
9.84FT 3M	6.53/34.82LX		12.76M 127.87SQ.M
13.12FT 4M	3.67/19.58LX		17.01M 227.33SQ.M
16.40FT 5M	2.35/12.53LX		21.27FT 355.20SQ.M
19.69FT 6M	1.63/8.70LX		25.52M 522.49SQ.M
22.97FT 7M	1.20/6.39LX		29.77M 696.19SQ.M
26.25FT 8M	0.92 / 4.90LX		34.04M 909.31SQ.M
29.52FT 9M	0.73 / 3.87LX		38.28M 1150.85SQ.M
32.80FT 10M	0.59 / 3.13LX		42.53M 1420.80SQ.M
<b>HT</b>	<b>EAVG/EMAX</b>	<b>ANGLE: 129.6DEG</b>	<b>DIA</b>

**LUMINOUS INTENSITY DISTRIBUTION DIAGRAM**

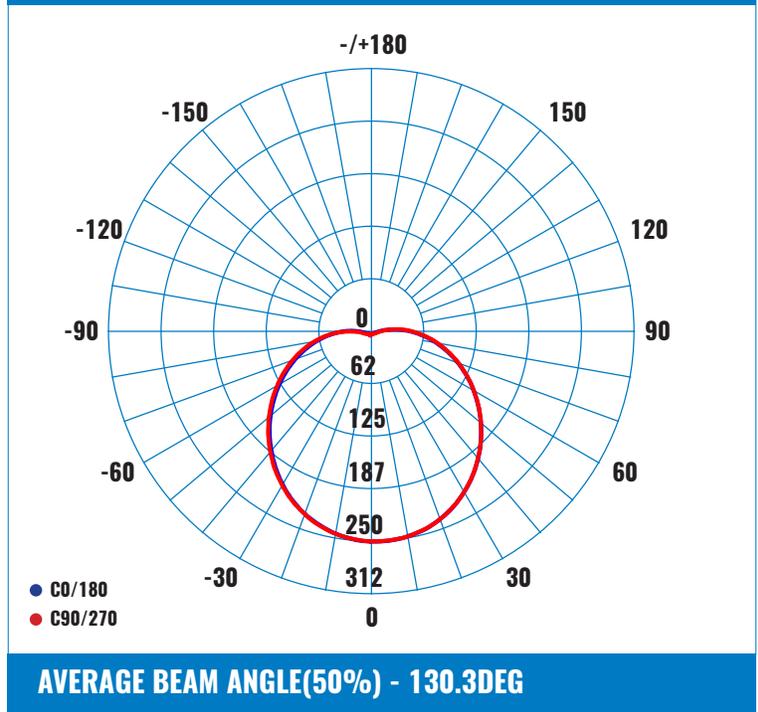

**CERTIFICATIONS**



**CAN ICES-005 (B) / NMB-005 (B)**

**DRIVER/LED CHIP**



**SAMSUNG**

**ORDERING INFORMATION - CM SERIES**

SERIES	SIZE	LED TYPE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIFFUSER	FINISH
E.G. CM2	11	D	15	1	3	D	WH
CM2- CEILING MOUNT	11 - 11"	D - DRIVER ON BOARD	15 - 15W	1 = 120V	3-3000K	D = TRIAC	WH = WHITE

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com