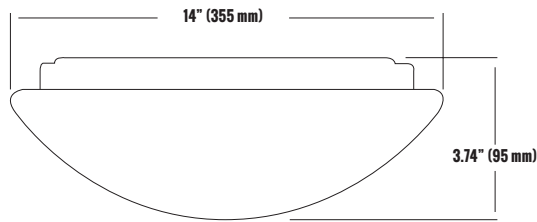


PRODUCT CODE: CM214D-2515CD -WH
5CCT LED FLUSHMOUNT/14 INCH ROUND PUFF/SLIM PROFILE


PRODUCT DESCRIPTION

The new Etlin-Daniels CM211D-1515CD and CM214D-2515CD LED Ceiling Flushmount fixtures offer the latest in compact and light weight design, even illumination, energy efficiency and value. These easy to install luminaires feature a 5CCT switch, providing 2700K / 3000K / 3500K / 4000K and 5000K options. These new color selectable fixtures provide a cost efficient solution to either replace older incandescent or compact fluorescent ceiling fixtures, or for new construction projects.

Applications include a wide range of residential, commercial, hospitality and healthcare facilities. The driver on board technology (DOB) is Triac Dimmable. Available in 11" and 14".

FEATURES

- LED Indoor Light Source.
- Low profile design.
- Durable polystyrene lens is removable for both installation and servicing
- 5CCT Switch - 2700K / 3000K / 3500K / 4000K / 5000K
- DOB technology.
- Triac Dimmable.
- Suitable for damp locations
- 5 year warranty
- L70 - 50,000 hours
- Energy Star certified


PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	WATTAGE	COLOR TEMPERATURE	LUMENS	SYSTEM EFFICACY	CRI	POWER FACTOR	HARMONIC DISTORTION
OSRAM 2835	90 CHIPS	25W - 2700K - 2324 LM / 3000K - 2436 LM / 3500K - 2532 LM 4000K - 2527 LM / 5000K - 2458 LM			93 - 102 LM / W	>80 CRI	>0.90	<40%

PRODUCT SPECIFICATIONS

BEAM ANGLE	VOLTAGES	POWER FREQ.	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
120°	AC 120V	50-60HZ	STEEL/PS	>50,000 HOURS	-20°C - 45°C -4°F - 49°F	-20°C - 45°C -4°F - 49°F	14 x 3.74 INCHES (355 x 95 MM)	14.77 X 14.76 X 4.33 INCHES (375 X 375 X 110 MM)



ADDITIONAL INFORMATION

INSTALLATION METHOD

FLUSH MOUNT - CEILING MOUNT

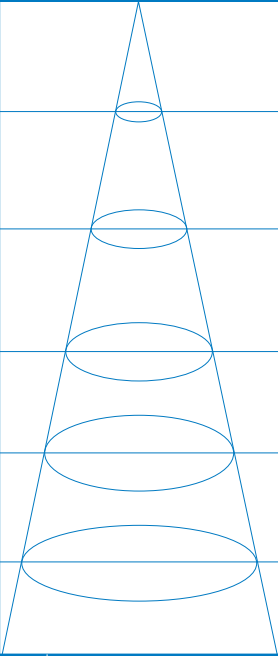
FIXTURE COLOR

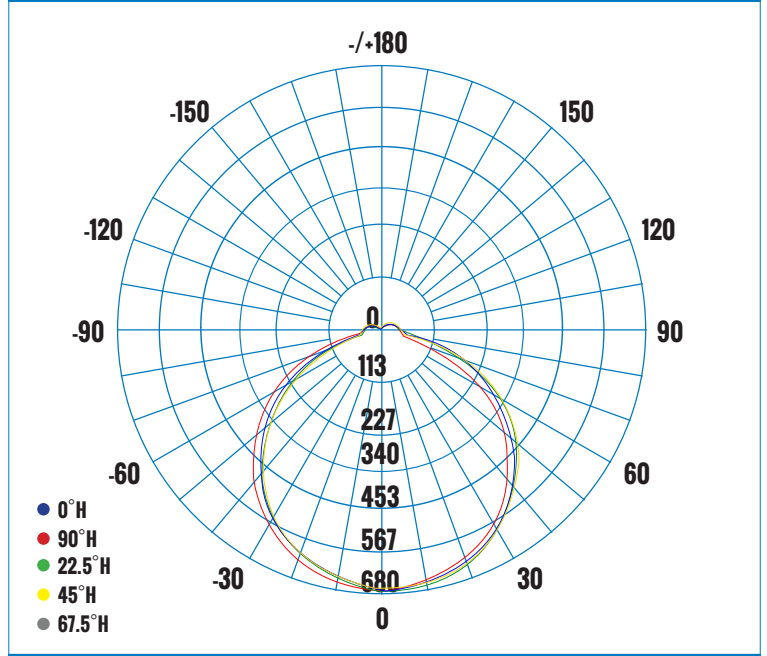
WHITE POLYSTYRENE

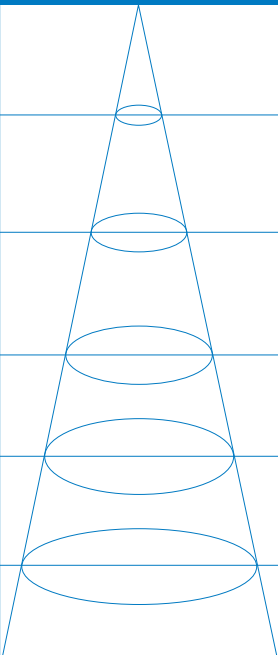
CONTROL TYPE

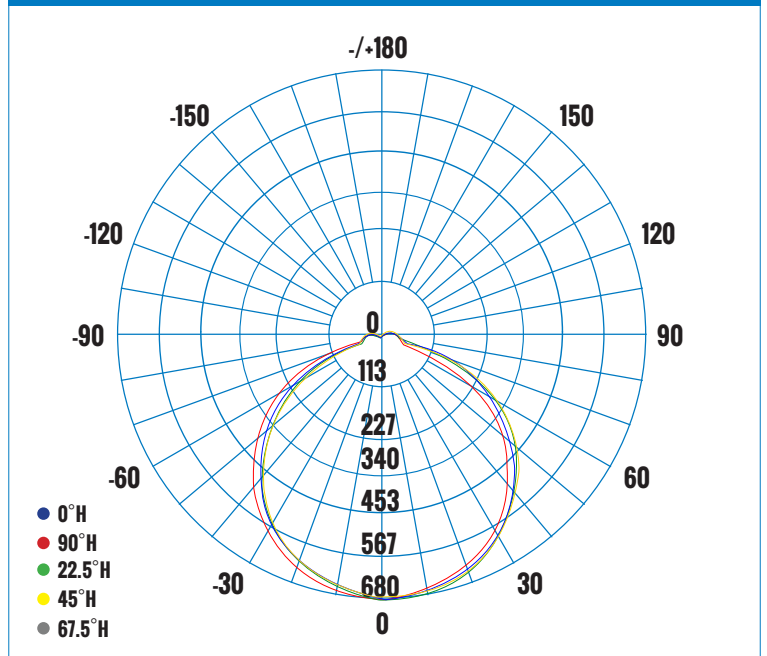
TRIAC DIMMABLE

PRODUCT CODE: CM214D-2515CD -WH
5CCT LED FLUSHMOUNT/14 INCH ROUND PUFF/SLIM PROFILE
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 25W 2700K

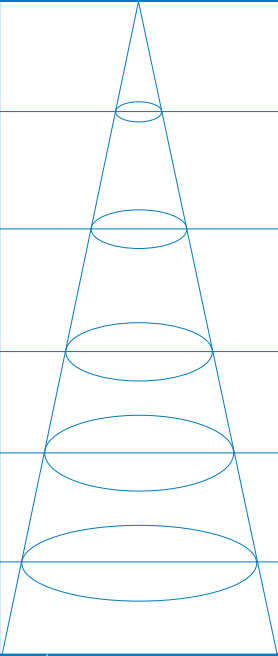
ILLUMINANCE (AT A DISTANCE) -			VERT BEAM	HORIZ BEAM
5.7FT 1.73M	20.9FC		18.5FT	18.6FT
11.3FT 3.44M	5.2FC		37.1FT	37.2FT
17.0FT 5.18M	2.3FC		55.6FT	55.8FT
22.7FT 6.92M	1.3FC		74.1FT	74.4FT
28.3FT 8.63M	0.8FC		92.7FT	93.0FT
34.0FT 10.36M	0.6FC		111.2FT	111.6FT
HT	EAVG/EMAX	VERT SPREAD: 117.1DEG HORI SPREAD: 117.3DEG	DIA	

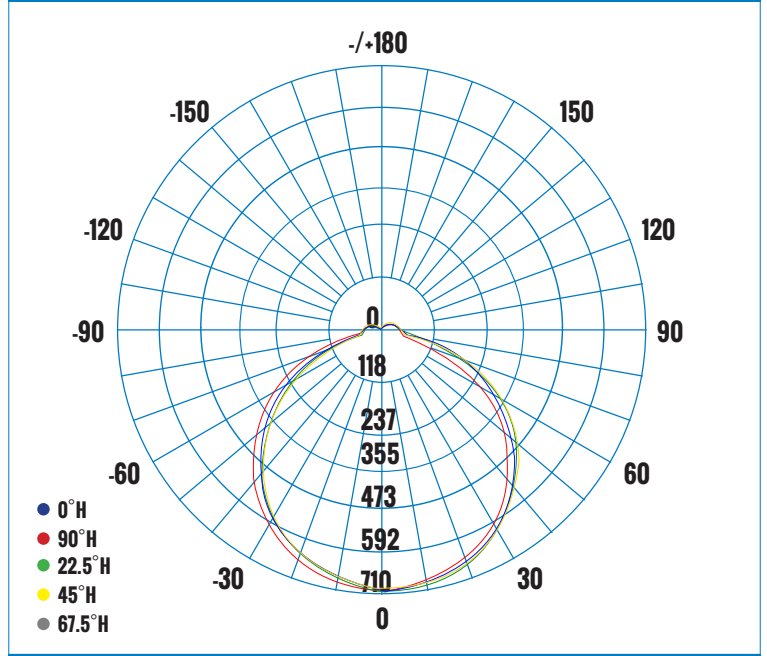
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 1,521
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 25W 3000K

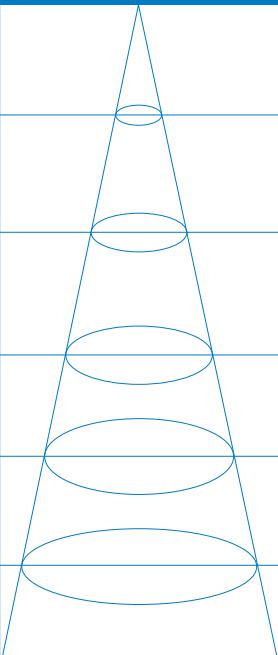
ILLUMINANCE (AT A DISTANCE) -			VERT BEAM	HORIZ BEAM
5.7FT 1.73M	21.1FC		20.7FT	20.6FT
11.3FT 3.44M	5.3FC		41.4FT	41.2FT
17.0FT 5.18M	2.3FC		62.0FT	61.8FT
22.7FT 6.92M	1.3FC		82.7FT	82.4FT
28.3FT 8.63M	0.8FC		103.4FT	103.0FT
34.0FT 10.36M	0.6FC		124.1FT	123.6FT
HT	EAVG/EMAX	VERT SPREAD: 122.5DEG HORI SPREAD: 122.3DEG	DIA	

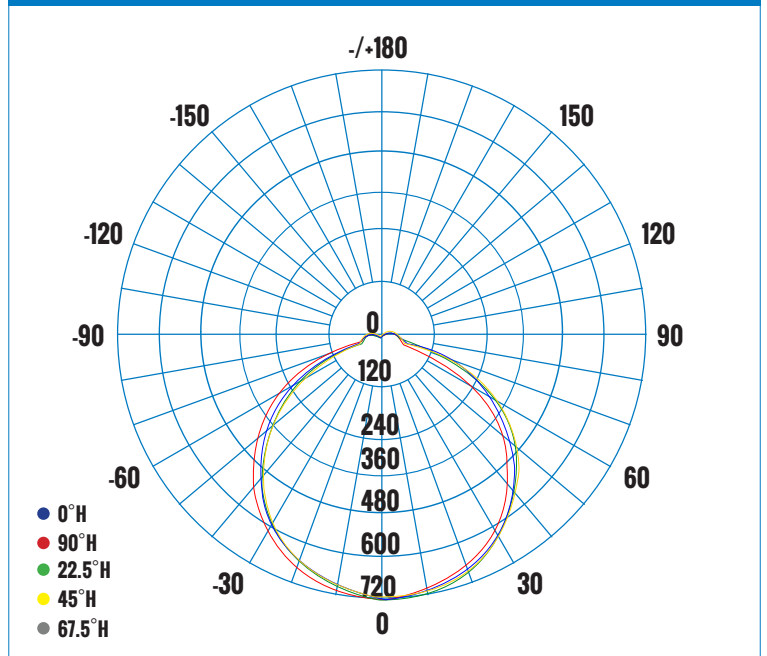
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 1,671.9

PRODUCT CODE: CM214D-2515CD -WH
5CCT LED FLUSHMOUNT/14 INCH ROUND PUFF/SLIM PROFILE
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 25W 3500K

ILLUMINANCE (AT A DISTANCE) -			VERT BEAM	HORIZ BEAM
5.7FT 1.73M	21.9FC		20.6FT	20.6FT
11.3FT 3.44M	5.5FC		41.2FT	41.1FT
17.0FT 5.18M	2.4FC		61.8FT	61.7FT
22.7FT 6.92M	1.4FC		82.4FT	82.3FT
28.3FT 8.63M	0.9FC		103.1FT	102.9FT
34.0FT 10.36M	0.6FC		123.7FT	123.4FT
HT	EAVG/EMAX	VERT SPREAD: 122.4DEG HORI SPREAD: 122.3DEG	DIA	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 1737.9
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 25W 4000K

ILLUMINANCE (AT A DISTANCE) -			VERT BEAM	HORIZ BEAM
5.7FT 1.73M	22.3FC		20.6FT	20.6FT
11.3FT 3.44M	5.6FC		41.2FT	41.2FT
17.0FT 5.18M	2.5FC		61.8FT	61.8FT
22.7FT 6.92M	1.4FC		82.5FT	82.4FT
28.3FT 8.63M	0.9FC		103.1FT	102.9FT
34.0FT 10.36M	0.6FC		123.7FT	123.5FT
HT	EAVG/EMAX	VERT SPREAD: 122.4DEG HORI SPREAD: 122.3DEG	DIA	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 1,765

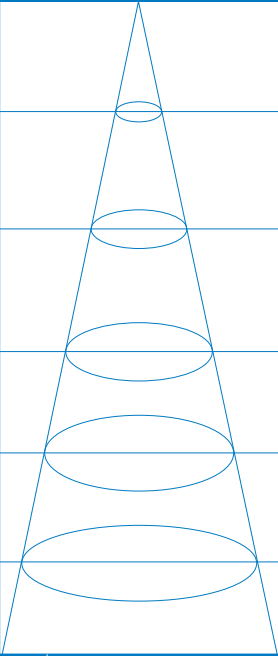
CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

PRODUCT CODE: CM214D-2515CD -WH

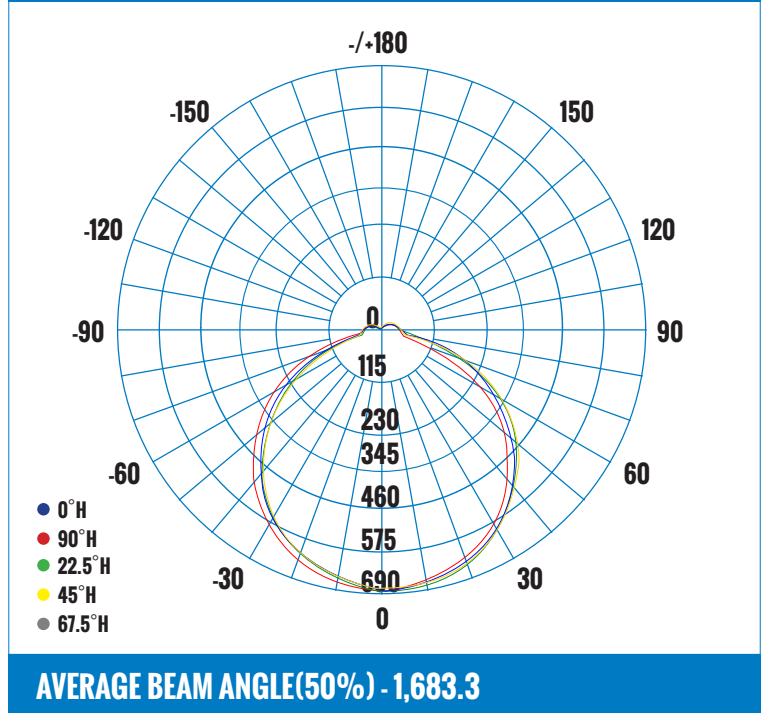
5CCT LED FLUSHMOUNT/14 INCH ROUND PUFF/SLIM PROFILE

LUMINAIRE PHOTOMETRIC (TEST REPORT) - 25W 5000K

ILLUMINANCE (AT A DISTANCE) -		VERT BEAM	HORIZ BEAM
5.7FT 1.73M	21.3FC	20.7FT	20.6FT
11.3FT 3.44M	5.3FC	41.5FT	41.2FT
17.0FT 5.18M	2.4FC	62.2FT	61.8FT
22.7FT 6.92M	1.3FC	82.9FT	82.3FT
28.3FT 8.63M	0.9FC	103.6FT	102.9FT
34.0FT 10.36M	0.6FC	124.4FT	123.5FT
HT	EAVG/EMAX	VERT SPREAD: 122.7DEG HORI SPREAD: 122.3DEG	
		DIA	



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




CERTIFICATIONS



CAN ICES-005 (B) / NMB-005 (B)

DRIVER/LED CHIP



ORDERING INFORMATION - CM SERIES

SERIES	SIZE	LED TYPE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	FINISH
E.G. CM2	14	D	25	1	5C	D	WH
CM2- CEILING MOUNT	14 - 14"	D - DRIVER ON BOARD	25 - 25W	1 - 120V	5C - 5CCT 2700K/ 3000K/ 3500K/ 4000K/ 5000K	D - TRIAC	WH - WHITE

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com