


PRODUCT CODE: CNM40-341F-DB

40W SLIM LED CANOPY

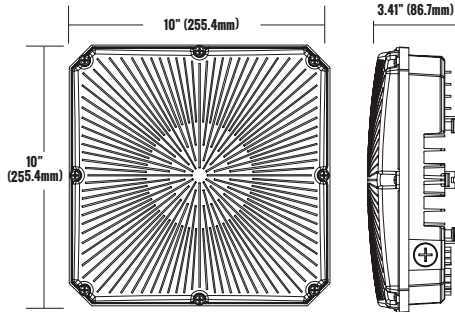

PRODUCT DESCRIPTION

The new Etlin-Daniels generation of CNM40 and CNM60 LED Slim Canopy fixtures offer an excellent choice for lighting hallways, tunnels, building entrances and canopies, storage areas and both underground and above ground parking facilities. With an IP66 Wet Location rating, it is ideal for indoor and outdoor applications, and its heat and UV resistant polycarbonate lens adds to its safety features in public access areas. We listened to what our customers and end-users were telling us, and this new generation features a frosted lens - this will eliminate the glare that drivers see when pulling into a parking garage from other canopy style fixtures. The slim profile allows for both flush mount and pendant mounting, and the 1-10V Continuous Dimming enhances the already significant energy savings for this fixture.

FEATURES

- LED light source
- Compact, light weight steel housing
- Frosted UV resistant polycarbonate lens provides even and glare-free illumination
- 40W replaces 175W HID / 60W replaces 250W HID
- Fixtures can be surface or pendant mounted
- IP66 Wet Location rated
- 1-10V Continuous Dimming
- 5 year warranty
- L70 - 50,000 hours
- DLC Premium

PRODUCT SPECIFICATIONS (OPTICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	CRI	VOLTAGE	POWER FREQ.	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
SAMSUNG	136 CHIPS	120LM/W	4800LM	4000K	140°	>80 CRI	347V	50-60HZ	>84%	>0.90	<20%

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	INGRESS PROTECT	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
40W	ADC12 ALUMINUM/ POLYCARBONATE OPTICAL LENS INCLUDED	IP66	>50,000 HOURS	-40°C~+70°C -40°F~+158°F	-40°C~-40°C -40°F~-104°F	10 X 10 X 3.41 INCHES (255.4 X 255.4 X 86.7 MM)	11.88 X 12.00 X 4.64 INCHES (302 X 305 X 118MM)



ADDITIONAL INFORMATION

INSTALLATION METHOD

PENDANT MOUNTNG/
FLUSH MOUNTNG

FIXTURE COLOR

DARK BRONZE

OPTIONAL ACCESSORIES

1-10 CONTINUOUS DIMMING


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

PRODUCT CODE: CNM40-341F-DB


40W SLIM LED CANOPY

LUMINAIRE PHOTOMETRIC (TEST REPORT)

ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 4031LM

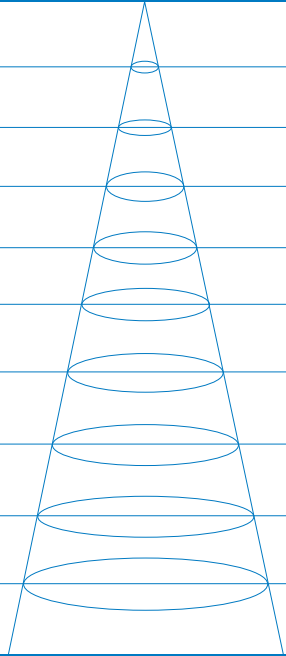3.28FT 1M	19.46,121.1LX		15.53FT 4.73M
6.56FT 2M	4.865,30.27LX		31.07FT 9.47M
9.84FT 3M	2.162,13.46LX		46.6FT 14.20M
13.12FT 4M	1.216, 7.569LX		62.13FT 18.93M
16.40FT 5M	0.7783, 4.844LX		77.67FT 23.67M
19.69FT 6M	0.5405,3.364LX		93.2FT 28.40M
22.97FT 7M	0.3971,2.471LX		108.7FT 33.13M
26.25FT 8M	0.3040,1.892LX		124.3FT 37.88M
29.52FT 9M	0.2402,1.495LX		139.8FT 42.61M
32.80FT 10M	0.1946,1.211LX		155.3FT 47.33M
HT	EAVG/EMAX	ANGLE: 134.2DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

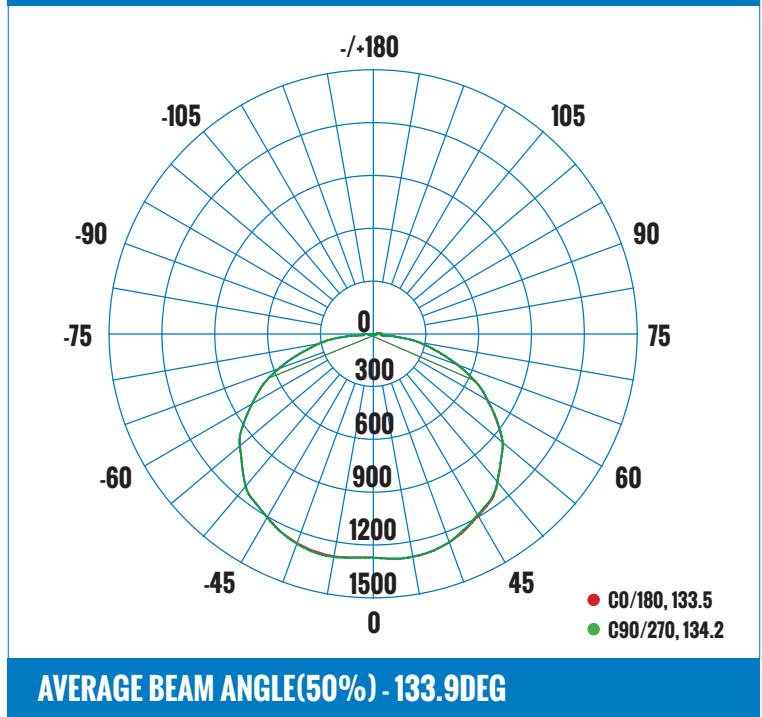

CERTIFICATIONS



DRIVER/LED CHIP

SAMSUNG

ORDERING INFORMATION - CNM SERIES

SERIES	SIZE	WATTS	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	LENS	FINISH
E.G. CN	M	40	3	4	1	F	DB
CN - CANOPY	M - MEDIUM	40 - 40W	3 - 347V	4 - 4000K	1 - 1-10V CONTINUOUS DIMMING	F - FROSTED LENS	DB - DARK BRONZE

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com