
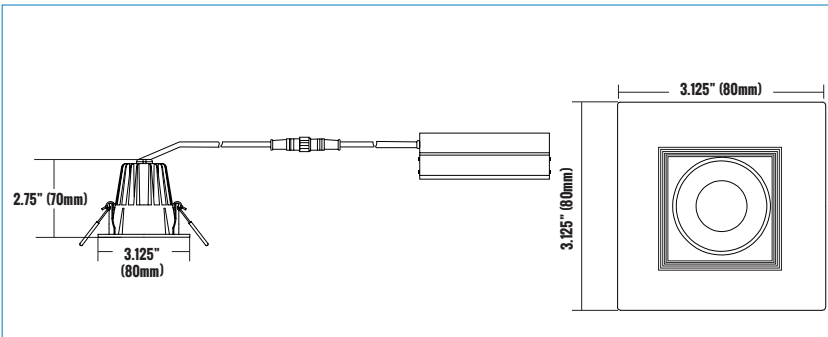


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

**PRODUCT CODE: DLRBS2-814WD-BL**
**2 INCH LED BAFFLE DOWNLIGHT / SQUARE**
**B**

**RECESSED BAFFLE**

### PRODUCT DESCRIPTION

The new Etlin-Daniels DLRBRS2-814WD-BL 2 inch Baffle Recessed Downlight with Warm Dim offers a sleek and fresh looking, energy efficient solution for retrofitting existing halogen and incandescent fixtures, or for new construction. Requiring only a 2-5/8" round hole for both Round and Square housings, and with the driver inside a compact connection box (does not require an external j-box), the DLRBR2 and DLRBS2 series are simple to install and are both IC and Airtight.

The 36° beam pattern, recessed into the Die Cast Aluminum baffle housing provides for even and glare-free illumination. Triac Dimmable in 3000K & 4000K with the Warm Dim feature - 3000K dims down to 2200K / 4000K dims down to 3000K. Available in both round - DLRBR2 and square - DLRBS2, in white, black and brushed nickel housings. Perfect for high end display purposes with >90CRI and an R9 rating of greater than 50.

### FEATURES

- LED Indoor Light Source
- 2" Baffle Recessed Downlight
- Durable die-cast aluminum alloy for optimal heat dissipation
- Scratch resistant, smooth powder coat finish.
- Type IC and Airtight. Damp location rated.
- 90CRI. R9 greater than 50.
- Triac Warm Dim down to 10%.
- Warm Dim - 3000K dims to 2200K // 4000K dims to 3000K.
- Round & Square housings available in white, black and brushed nickel.
- 5 year warranty.
- L70 - 50,000 hours.
- Energy Star Listed.

### PRODUCT SPECIFICATIONS (OPTICAL DATA)

### PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	R9	CRI	SYSTEM EFFICIENCY	VOLTAGE	POWER FREQ.	POWER FACTOR
COB	1 CHIP	75LM/W	600LM	4000K-3000K	36°	>50	>90CRI	>80%	AC120V	50-60HZ	>0.90

### PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
8W	DIE CAST ALUMINUM	>50,000 HOURS	-20°C~+80°C -4°F~+176°F	-18°C~+49°C -0°F~+120°F	3.13 X 3.13 X 2.75 INCHES (80 X 80 X 70 MM)	5.5 X 3.94 X 3.15 INCHES (140 X 100 X 80MM)



### ADDITIONAL INFORMATION

#### INSTALLATION METHOD

**RECESSED CEILING MOUNT**

#### FIXTURE COLOR

**BLACK**

#### CONTROL TYPE

**TRIAC WARM DIM**


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

**PRODUCT CODE: DLRBS2-814WD-BL**


**2 INCH LED BAFFLE DOWNLIGHT / SQUARE**

**LUMINAIRE PHOTOMETRIC (TEST REPORT)**

**ILLUMINANCE (AT A DISTANCE) FLUX OUT: 317.5LM**

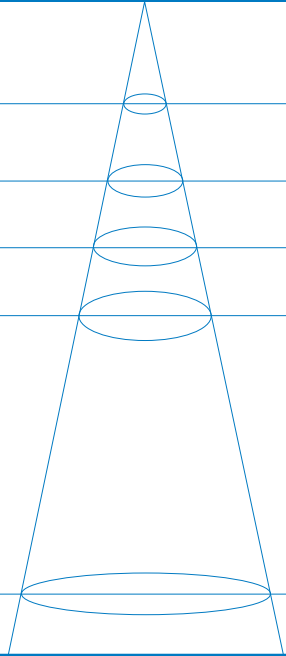			
3.99FT 1.219M	573.5, 846.5LX		2.71FT 82.72CM
6.56FT 2M	213.1, 314.6LX		4.45FT 135.69CM
9.84FT 3M	94.72, 139.8LX		6.68FT 203.53CM
13.12FT 4M	53.28, 78.64LX		8.90FT 271.38CM
32.81FT 10M	8.525, 12.58LX		22.26FT 678.45CM
<b>HT</b>	<b>EAVG/EMAX</b>	<b>ANGLE: 37.48DEG</b>	<b>DIA</b>

**LUMINOUS INTENSITY DISTRIBUTION DIAGRAM**

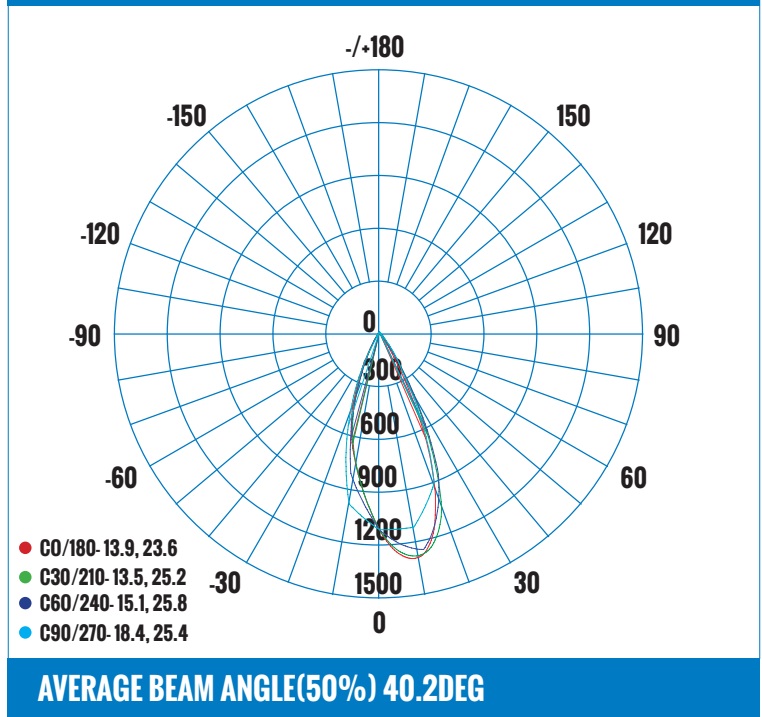

**CERTIFICATIONS**




**DRIVER/LED CHIP**



**120V APPROVED DIMMERS**

LUTRON: CTCL-153PDH · CTCL-153P  
 ·CT-600P · DVCL-153P  
 LEVITON: 6672 · 6674  
 COOPER: HCL453PTCCCV6  
 ETLIN DANIELS: DS-1SD-G-WH · DS-1SDD-G-WH  
 ·DS-1TD-G-WH · DS-1TDD-G-WH

**ACCESSORIES**



ROUGH-IN PLATE  
PART# DLRB-MP



72" EXTENSION CORD  
PART# DLSGR3-EC72



240" EXTENSION CORD  
PART# DLSGR3-EC240

**ORDERING INFORMATION - DLRBS SERIES**

SERIES	SHAPE	SIZE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	COLOR
E.G. DLRB	S	2	8	1	4	WD	BL
DLRB - DOWN LIGHT	S - SQUARE	2"	8 - 8W	1 - 120V	4 - 4000K	WD - WARM DIM	WH - WHITE
RECESSED BAFFLE							BL - BLACK
							BN - BRUSHED NICKEL

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions · sales@etlin.com