

## PRODUCT DESCRIPTION

The new Etlin-Daniels DLSR6-1213CD-WH LED Ultrathin Downlight offers a modern, sleek looking energy efficient option for both new construction and retrofit/remodeling projects. It installs easily where there is minimal ceiling space due to ductwork, joists and beams.

The new CD design comes with a white trim. Snap-on black and brushed nickel trims are available as options. And, to reduce your inventory needs, there is a CCT (Correlated Color Temperature) switch that is conveniently mounted on the back of the Ultrathin housing itself, that allows for tuning between 3000K, 4000K and 5000K color temperatures.

Why waste time installing older space-restrictive recessed options when the Etlin-Daniels CCT Ultrathin provides a quick install solution and elegant, superior illumination for your residential and commercial lighting projects?

- Aluminum hardwire box with Triac dimmable LED driver
- Includes a 7" plenum cable from driver box to ultrathin fixture.

## FEATURES

- LED Indoor Light Source
- 6" LED downlight
- Durable air tight aluminum body
- Elegant white paint finish
- Etched white Polycarbonate diffuser lens
- Includes 2 spring loaded clips for mounting to any ceiling material
- CCT switch conveniently located allows choice of 3000K, 4000K, and 5000K
- Snap-on trims available in black and brushed nickel
- Triac dimmable
- IC Air-tight rated
- Damp location rated
- 5 year warranty
- Energy Star certified

## PRODUCT SPECIFICATIONS (OPTICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE (CHANGEABLE)	BEAM ANGLE	CRI	SYSTEM EFFICIENCY	VOLTAGE	POWER FREQ.	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
HONGLI 2835	36 CHIPS	58.3LM/W	700LM	3000K 4000K 5000K	120°	>80CRI	>0.96%	AC120V	60HZ	>82%	>0.93	23%

## PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

## PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
12W	ALUMINUM/ POLYCARBONATE LENS	>50,000 HOURS	-40°C~-60°C -40°F~-140°F	-30°C~-40°C -40°F~-104°F	Ø6.85 X 1 INCHES (174 X 24 MM)	7.48 X 7.48 X 2.46 INCHES (190 X 190 X 60MM)



## ADDITIONAL INFORMATION

### INSTALLATION METHOD

RECESSED CEILING MOUNT

### FIXTURE COLOR

WHITE WITH WHITE  
ETCHED DIFFUSER

### CONTROL TYPE

TRIAC DIMMABLE DRIVER INCLUDED


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

**PRODUCT CODE: DLSR6-121CD-WH**


**6 INCH LED ULTRATHIN DOWNLIGHT - CCT SERIES**



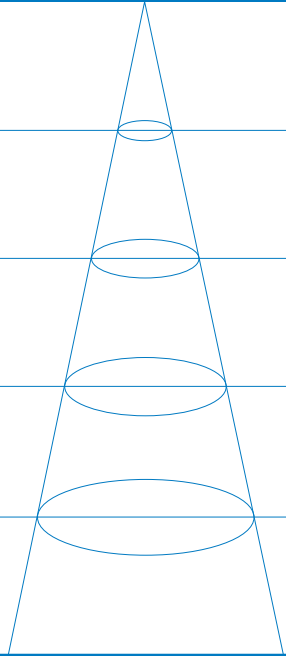


**LUMINAIRE PHOTOMETRIC (TEST REPORT)**

**ILLUMINANCE (AT A DISTANCE) FLUX OUT: 663.9LM**

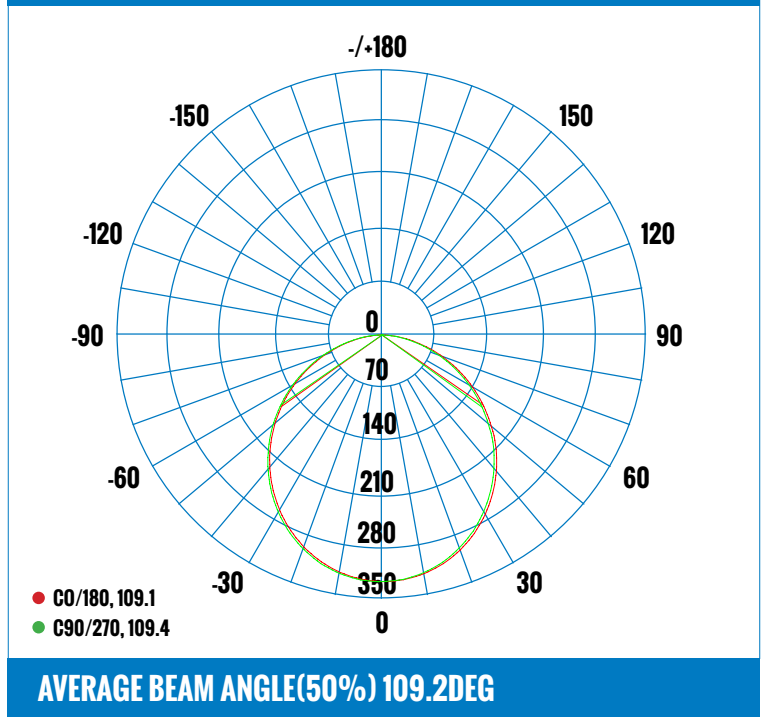3.281FT 1M	103.6, 335.3LX		9.23FT 281.43CM
6.562FT 2M	25.90, 83.83LX		18.46FT 562.85CM
9.843FT 3M	11.51, 37.26LX		27.69FT 844.28CM
13.12FT 4M	6.476, 20.96LX		36.93FT 1125.71CM
16.4FT 5M	4.145, 13.41LX		46.16FT 1407.14CM
<b>HT</b>	<b>EAVG/EMAX</b>	<b>ANGLE: 109.2DEG</b>	<b>DIA</b>

**LUMINOUS INTENSITY DISTRIBUTION DIAGRAM**



<b>CERTIFICATIONS</b> 	<b>DRIVER / LED CHIP</b>  	<b>120V APPROVED DIMMERS</b> LUTRON: DVELV-300P · SELV-300P · SFTU-5A3P · DVCL-153P · CTCL-153P LEVITON: IPE05-1LZ · 6615 WATTSTOPPER: HDCL-453M	<b>ACCESSORIES</b>  <p>CLIP-ON TRIM BLACK PART# DLSTM6-BL                  CLIP-ON TRIM BRUSHED NICKEL PART# DLSTM6-BN                  72" EXTENSION CORD PART# DLSEC-72                  120" EXTENSION CORD PART# DLSEC-120</p>	PRE-MOUNTING PLATE FOR NEW CONSTRUCTION APPLICATIONS AVAILABLE. PLEASE CONTACT ETLIN-DANIELS.  <b>PART NO#: DLSW6-MP</b>
---	--	---	---	---

**ORDERING INFORMATION - DLSR SERIES**

SERIES	SHAPE	SIZE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	COLOR
E.G. DLS	R	6	12	1	C	D	WH
DLS - DOWNLIGHT SLIM	R - ROUND	6 - 6"	12 - 12W	1 - 120V	C - CHANGEABLE 3000K, 4000K, 5000K	D - TRIAC	WH - WHITE

**IF PRE-MOUNTING PLATE IS REQUIRED FOR NEW CONSTRUCTION PROJECTS, PLEASE QUOTE: PART NO#: DLSW6-MP WHEN ORDERING.**

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com