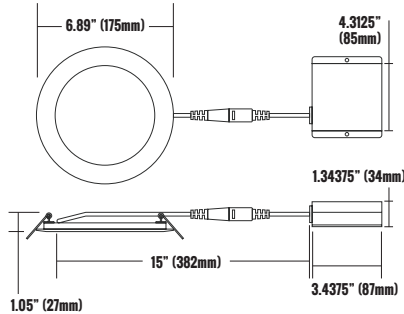


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

**PRODUCT CODE: DLSWR6-1213D-BN-FF**
**6 INCH LED ULTRA SLIM PROFILE DOWNLIGHT**
**B5**

**RECESSED LOW PROFILE**

## PRODUCT DESCRIPTION

The Etlin-Daniels DLSWR6-1213D-BN-FF LED Ultraslim Profile Downlight is a modern, sleek looking energy efficient option for both new construction and retrofit/remodeling projects. It installs easily where there is limited ceiling space due to ductwork, joists and beams. With Etlin-Daniels IP65 rating, our Ultraslim Downlights are suitable for a wide range of both indoor & outdoor applications. Why waste time installing older space restrictive recessed options when the Etlin-Daniels Ultraslim Profile Downlight provides a quick install solution and elegant, superior quality lighting for both residential and commercial applications?

- Aluminum hardwire box with dimmable LED driver
- Includes a 7" cable from driver to fixture

## FEATURES

- LED light source
- 6" LED downlight
- Durable air tight Aluminum body
- Elegant Brushed Nickel finish
- Etched white Polycarbonate diffuser lens
- Includes two spring loaded clips for mounting to any ceiling material
- The slim profile design allows mounting under joists or duct work
- 50,000hrs L70 life
- Triac dimmable
- IC Air-tight rated
- Suitable for wet location - IP65
- 5 year limited warranty

## PRODUCT SPECIFICATIONS (OPTICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	CRI	SYSTEM EFFICIENCY	VOLTAGE	POWER FREQ.	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
HONGLI TRONIC	60 CHIPS	58.3LM/W	700LM	3000K	120°	>80CRI	>90%	AC120V	50-60HZ	>80%	>0.98	<10%

## PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

## PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
12W	ALUMINUM/ POLYCARBONATE LENS	>50,000 HOURS	- 40°C~+100°C - 40°F~+212°F	- 40°C~+85°C - 40°F~+185°F	6.89 X 1.05 X 6.89 INCHES (175 X 27 X 175 MM)	17.32 X 11.02 X 9.05 INCHES (440 X 280 X 230MM)



## ADDITIONAL INFORMATION

### INSTALLATION METHOD

**RECESSED CEILING MOUNT**

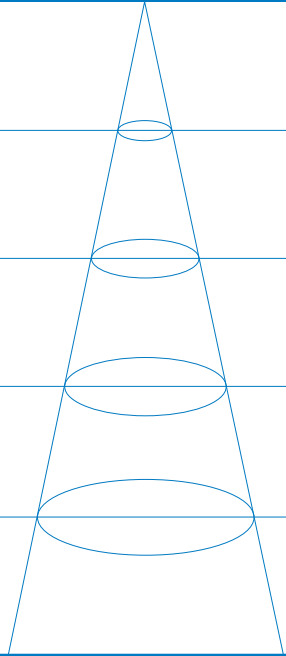
### FIXTURE COLOR

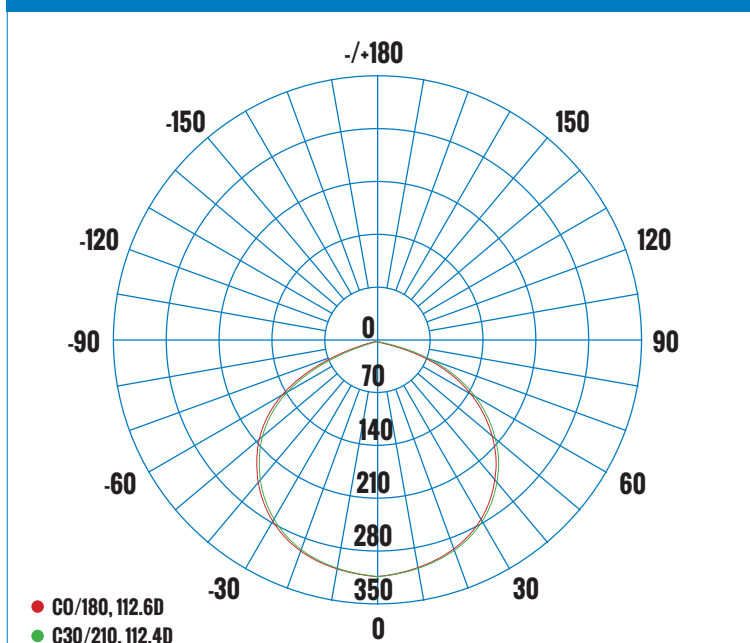
**BRUSHED NICKEL WITH WHITE  
ETCHED DIFFUSER**

### CONTROL TYPE

**TRIAC DIMMABLE DRIVER INCLUDED**

**PRODUCT CODE: DLSWR6-1213D-BN-FF**
**6 INCH LED ULTRA SLIM PROFILE DOWNLIGHT**
**LUMINAIRE PHOTOMETRIC (TEST REPORT)**
**ILLUMINANCE (AT A DISTANCE) FLUX OUT: 663.7LM**

3.281FT 1M	8.277, 28.96FC 89.09, 311.8LX		9.80FT 298.84CM
6.562FT 2M	2.069, 7.241FC 22.27, 77.94LX		19.61FT 597.67CM
9.843FT 3M	0.9196, 3.218FC 9.899, 34.64LX		29.41FT 896.51CM
13.12FT 4M	0.5173, 1.810FC 5.568, 19.49LX		39.22FT 1195.34CM
16.4FT 5M	0.3311, 1.159FC 3.564, 12.47LX		49.02FT 1494.18CM
<b>HT</b>	<b>EAVG/EMAX</b>	<b>ANGLE: 112.41DEG</b>	<b>DIA</b>

**LUMINOUS INTENSITY DISTRIBUTION DIAGRAM**

**AVERAGE BEAM ANGLE(50%) 112.5DEG**
**CERTIFICATIONS**

**DRIVER / LED CHIP**

**120V APPROVED DIMMERS**

LUTRON:  
 CTCL-153PDH · CTCL-153P · CT-600P  
 LEVITON:  
 6672 · 6674  
 COOPER:  
 HCL453PTCCCV6

**ACCESSORIES**


PRE-MOUNTING PLATE FOR NEW  
 CONSTRUCTION APPLICATIONS AVAILABLE.  
 PLEASE CONTACT ETLIN-DANIELS.


**PART NO#: DLSW6-MP**
**ORDERING INFORMATION - DLSW SERIES**

SERIES	IP RATING	SHAPE	SIZE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	COLOR	LENS	TRIM
E.G. <b>DLS</b>	<b>W</b>	<b>R</b>	<b>6</b>	<b>12</b>	<b>1</b>	<b>3</b>	<b>D</b>	<b>BN</b>	<b>F</b>	<b>F</b>
DLS - DOWNLIGHT SLIM	W - WET LOCATION	R - ROUND	6 - 6"	12 - 12W	1 - 120V	3 - 3000K	D - TRIAC	BN - BRUSHED	F - FROSTED	F - FIXED
	IP65							NICKEL		

**IF PRE-MOUNTING PLATE IS REQUIRED FOR NEW CONSTRUCTION PROJECTS, PLEASE QUOTE: PART NO#: DLS6-MP WHEN ORDERING.**

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions · sales@etlin.com