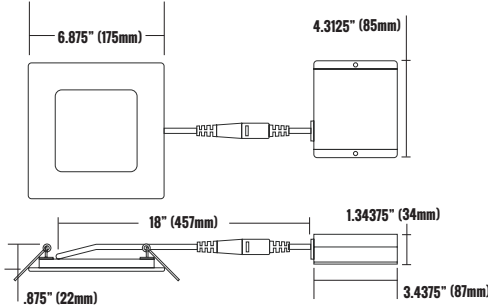


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

PRODUCT CODE: DLSWS6-1214D-BN-FF
6 INCH LED ULTRA SLIM PROFILE DOWNLIGHT/SQUARE
B23

RECESSED LOW PROFILE

PRODUCT DESCRIPTION

The Etlin-Daniels DLSWS6-1214D-BN-FF LED Ultraslim Profile Square Downlight is a modern, sleek looking energy efficient option for both new construction and retrofit/remodeling projects. It installs easily where there is limited ceiling space due to ductwork, joists and beams. With Etlin-Daniels IP65 rating, our Ultraslim Downlights are suitable for a wide range of both indoor & outdoor applications. Why waste time installing older space restrictive recessed options when the Etlin-Daniels Ultraslim Profile Downlight provides a quick install solution and elegant, superior quality lighting for both residential and commercial applications?

- Aluminum hardwire box with dimmable LED driver
- Includes a 7" cable from driver to fixture

FEATURES

- LED light source
- 6" LED downlight
- Durable air tight Aluminum body
- Elegant Brushed Nickel finish
- Etched white Polycarbonate diffuser lens
- Includes two spring loaded clips for mounting to any ceiling material
- The slim profile design allows mounting under joists or duct work
- 50,000hrs L70 life
- Triac dimmable
- IC Air-tight rated
- Suitable for wet location - IP65
- 5 year limited warranty


PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	CRI	SYSTEM EFFICIENCY	VOLTAGE	POWER FREQ.	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
HONGLI TRONIC	60 CHIPS	58.3LM/W	700LM	4000K	120°	>80CRI	>90%	AC120V	50-60HZ	>80%	>0.98	<10%

PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
12W	ALUMINUM/ POLYCARBONATE LENS	>50,000 HOURS	-40°C~+100°C -40°F~+212°F	-40°C~+85°C -40°F~+185°F	6.875 X .875 X 6.875 INCHES (175 X 22 X 175 MM)	23.03 X 14.76 X 9.05 INCHES (585 X 375 X 230MM)

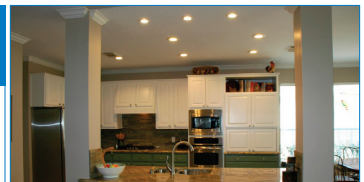

ADDITIONAL INFORMATION

INSTALLATION METHOD

RECESSED CEILING MOUNT

FIXTURE COLOR

**BRUSHED NICKEL WITH WHITE
ETCHED DIFFUSER**

CONTROL TYPE

TRIAC DIMMABLE DRIVER INCLUDED


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

PRODUCT CODE: DLSWS6-1214D-BN-FF


6 INCH LED ULTRA SLIM PROFILE DOWNLIGHT/SQUARE

LUMINAIRE PHOTOMETRIC (TEST REPORT)



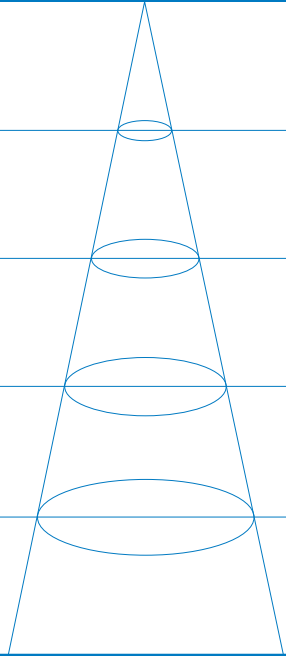

ILLUMINANCE (AT A DISTANCE) FLUX OUT: 726.5LM

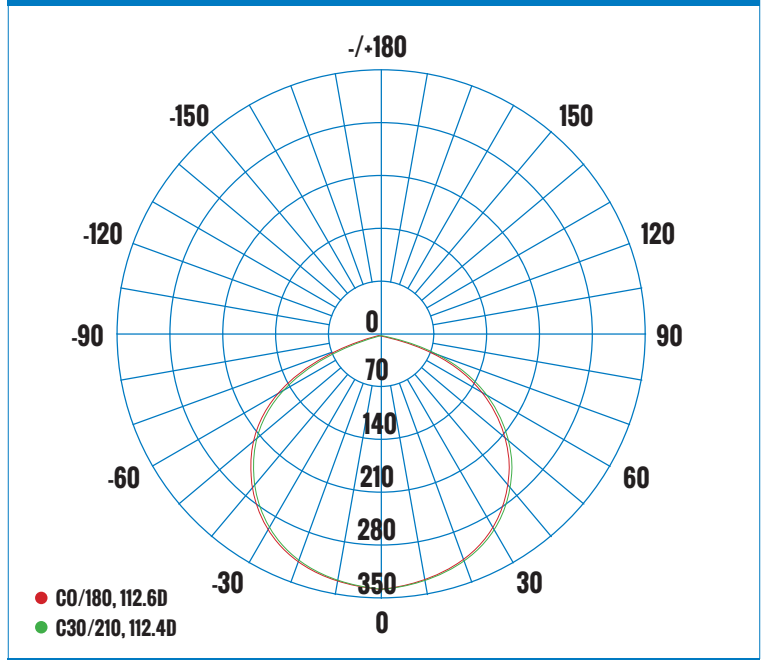3.281FT 1M	9.060, 31.86FC 97.52, 342.9LX		9.791FT 298.44CM
6.562FT 2M	2.265, 7.965FC 24.38, 85.73LX		19.58FT 596.88CM
9.843FT 3M	1.007, 3.540FC 10.84, 38.10LX		29.37FT 895.32CM
13.12FT 4M	0.5663, 1.991FC 6.095, 21.43LX		39.17FT 1193.761CM
16.4FT 5M	0.3624, 1.274FC 3.901, 13.72LX		48.96FT 1492.20CM
HT	EAVG/EMAX	ANGLE: 112.34DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



AVERAGE BEAM ANGLE(50%) 112.5DEG

CERTIFICATIONS 	DRIVER / LED CHIP 	120V APPROVED DIMMERS LUTRON: CTCL-153PDH · CTCL-153P · CT-600P LEVITON: 6672 · 6674 COOPER: HCL453PTCCCV6	ACCESSORIES  72" EXTENSION CORD PART# DLSEC-72 120" EXTENSION CORD PART# DLSEC-120	PRE-MOUNTING PLATE FOR NEW CONSTRUCTION APPLICATIONS AVAILABLE. PLEASE CONTACT ETLIN-DANIELS.  PART NO#: DLSS6-MP
---	---	---	--	--

ORDERING INFORMATION - DLSW SERIES

SERIES	IP RATING	SHAPE	SIZE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	COLOR	LENS	TRIM
E.G. DLS	W	S	6	12	1	4	D	BN	F	F
DLS - DOWNLIGHT SLIM	W - WET LOCATION IP65	S - SQUARE	6 - 6"	12 - 12W	1 - 120V	4 - 4000K	D - TRIAC	BN - BRUSHED NICKEL	F - FROSTED	F - FIXED

IF PRE-MOUNTING PLATE IS REQUIRED FOR NEW CONSTRUCTION PROJECTS, PLEASE QUOTE: PART NO#: DLSS6-MP WHEN ORDERING.

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions · sales@etlin.com