


PRODUCT CODE: EC222WH-A13BB-GU-4

LED RUNNING MAN EXIT SIGN & EMERGENCY LIGHT COMBO

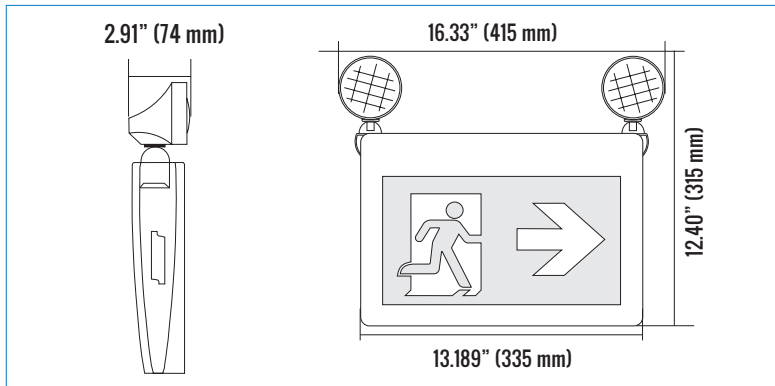

HOUSING/MOUNTING

The new Etlin-Daniels EC222WH-A13BB-GU-4 LED Running Man Combo Exit Sign is constructed with an injection-molded thermoplastic ABS housing that is UL94V-0 flame rated. The tapered profile is a compliment to many application decors.

The sign components and universal canopy snap together for simple side and wall mount applications, and the 2W combo heads are fully adjustable to provide maximum emergency illumination. 3 Running Man pictogram legends are supplied to cover all directional orientations on both single and double sided installations. Wall mounting is achieved using the spider knockout pattern. LED's operate in AC mode and emergency DC mode.


FEATURES

- Compact tapered profile thermoplastic LED Running Man Combo Exit Sign
- 3 pictogram legends for directional orientation
- Single & double sided
- 120V & 347V dual input operation
- Ultrabright LED panel for emergency mode
- 2 x 2W fully adjustable heads
- Test switch and charge indicator
- Built-in 3.6V, 1800mAh Nicad battery for minimum 120 minutes emergency operation
- 35 hour recharge time
- Suitable for damp locations
- cCSAus approved
- 3 year limited warranty

PRODUCT SPECIFICATIONS (OPTICAL & ELECTRICAL DATA)

LED TYPE	LED QTY	VOLTAGE	POWER FREQUENCY	POWER FACTOR
HEAD: SMD 45 * 45 STRIP: SMD2835 0.2W LED	2 CHIPS (REMOTE HEAD) 30 PCS (LED STRIP)	120V/347V	50 / 60HZ	120V - .95 347V - .95

PRODUCT SPECIFICATIONS

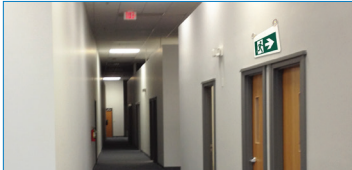WATTAGE	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE	
3W-120V 4.5W-347V	ABS THERMOPLASTIC	>50,000 HOURS	-10°C~+40°C +14°F~+104°F	-5°C~+30°C +23°F~+86°F	16.33 X 2.91 X 12.4 INCHES (415 X 74 X 315 MM)	13.77 X 4.92 X 15.74 INCHES (350 X 125 X 400 MM)	

ADDITIONAL INFORMATION

INSTALLATION METHOD	FIXTURE COLOR	OPERATION TYPE
CEILING MOUNT/WALL MOUNT	WHITE HIGH IMPACT THERMOPLASTIC CONSTRUCTION	LED CIRCUITS IN NORMAL (AC INPUT) AND EMERGENCY (DC INPUT) MODES / DIRECTIONAL LED HEADS OPERATION IN DC MODE


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

PRODUCT CODE: EC222WH-A13BB-GU-4


LED RUNNING MAN EXIT SIGN & EMERGENCY LIGHT COMBO

LUMINAIRE PHOTOMETRIC (TEST REPORT)

ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 2.66LM

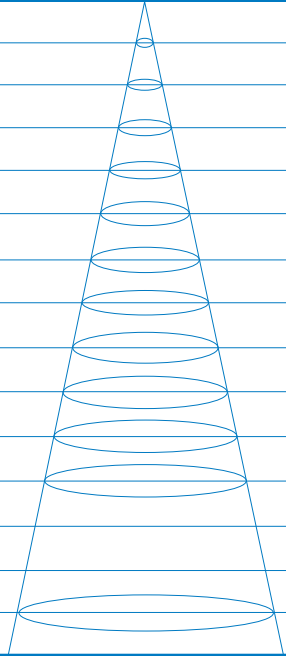3.28FT 1M	1.11LX		7.68FT 234.17CM
6.56FT 2M	0.28LX		15.37FT 468.34CM
9.84FT 3M	0.12LX		23.05FT 702.51CM
13.12FT 4M	0.07LX		30.73FT 936.68CM
16.40FT 5M	0.04LX		38.41FT 1170.85CM
19.69FT 6M	0.03LX		46.09FT 1405.02CM
22.97FT 7M	0.02LX		53.77FT 1639.19CM
26.25FT 8M	0.02LX		61.46FT 1873.36CM
29.52FT 9M	0.01LX		69.14FT 2107.53CM
32.80FT 10M	0.01LX		76.82FT 2341.70CM
36.08FT 11M	0.01LX		84.51FT 2575.87CM
39.37FT 12M	0.01LX		92.19FT 2810.04CM
42.65FT 13M	0.01LX		99.87FT 3044.21CM
45.93FT 14M	0.01LX		107.55FT 3278.38CM
49.21FT 15M	0.00LX		115.24FT 3512.55CM
HT	EAVG/EMAX	ANGLE: 99.0DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

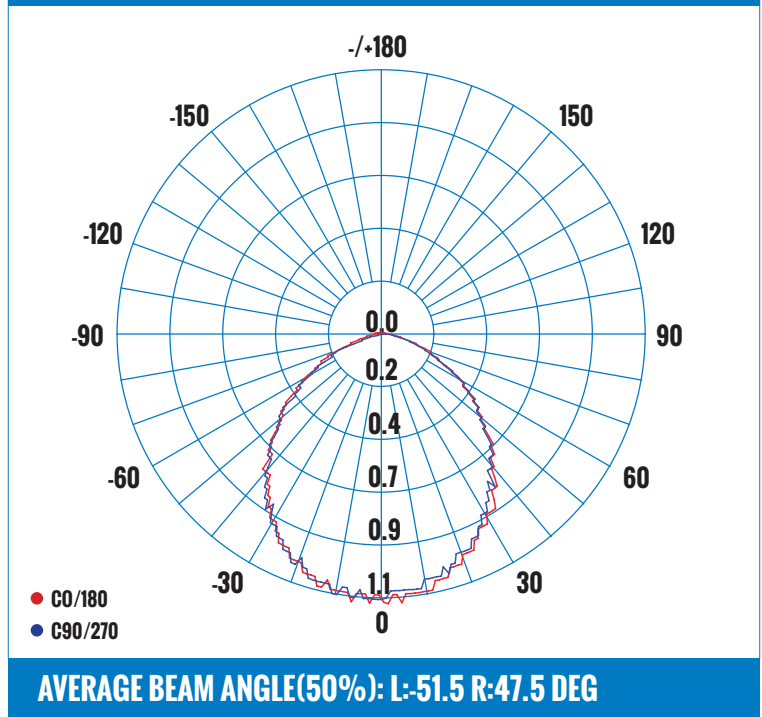

CERTIFICATIONS



ACCESSORIES

**REPLACEMENT BATTERY
NCB-3.6V-1800**

ORDERING INFORMATION - EC SERIES

SERIES	MODEL	COLOR	INPUT VOLTAGE	VOLTAGE	BATTERY	FACE COLOR	MOUNTING	WATTAGE
E.G. EC	222	WH	A	13	BB	G	U	4
EC - EXIT / LIGHT COMBO	222 - MODEL	WH - WHITE	A - AC	13 - 120/347V	BB - BATTERY BACKUP	G - GREEN	U - UNIVERSAL	4 - 2 X 2W

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com