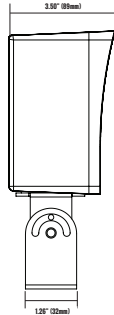



**PRODUCT CODE: FLM4-5035N-BL-YK**
**LED FLOOD LIGHT/ YOKE BRACKET**


## PRODUCT DESCRIPTION

The Etlin-Daniels FLM4-5035N-BL-YK LED Flood fixture offers the latest in both design and energy efficient performance. With its reduced size and textured architectural powdercoat finish, it will compliment a wide range of industrial, residential and commercial applications. The durable and watertight casting along with the tempered glass lens allow for long and energy efficient life. Fixtures available with either yoke or knuckle mount.

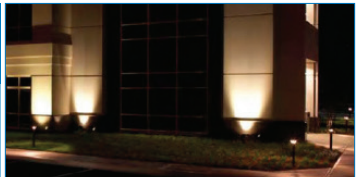
## FEATURES

- LED Outdoor Light Source
- Textured Architectural Powdercoat finish
- Tempered glass lens
- Removable back cover for easy installation
- Yoke bracket with watertight cord grip installed
- Suitable for wet location
- 15" - 20" lead lengths
- Non-Dimmable
- 5 year warranty
- L70 - 50,000 hours

## PRODUCT SPECIFICATIONS (OPTICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	CRI	SYSTEM EFFICIENCY	VOLTAGE	POWER FREQ.	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
PHILIPS 3030	50 CHIPS	95LM/W	5043.4LM	5000K	105±10°	>80CRI	>90%	AC347V	50-60HZ	>89%	>0.90	<15%

## PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	INGRESS PROTECT	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE	
50W	DIE CAST ALUMINUM/BLACK	IP65	>50,000 HOURS	-25°C~-80°C -13°F~-176°F	-40°C~-40°C -40°F~-104°F	8.43 X 7.17 X 3.50 INCHES (214 X 182 X 89 MM)	9.65 X 7.28 X 3.62 INCHES (245 X 185 X 92 MM)	

## ADDITIONAL INFORMATION

### INSTALLATION METHOD

YOKE MOUNT

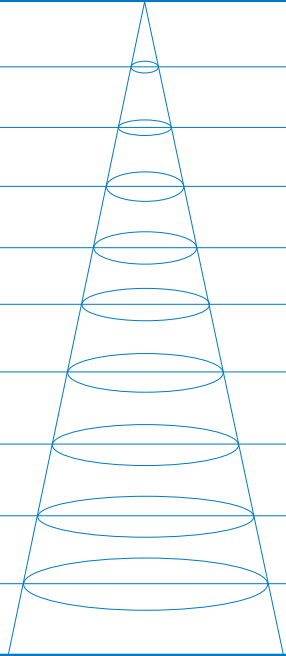
### FIXTURE COLOR

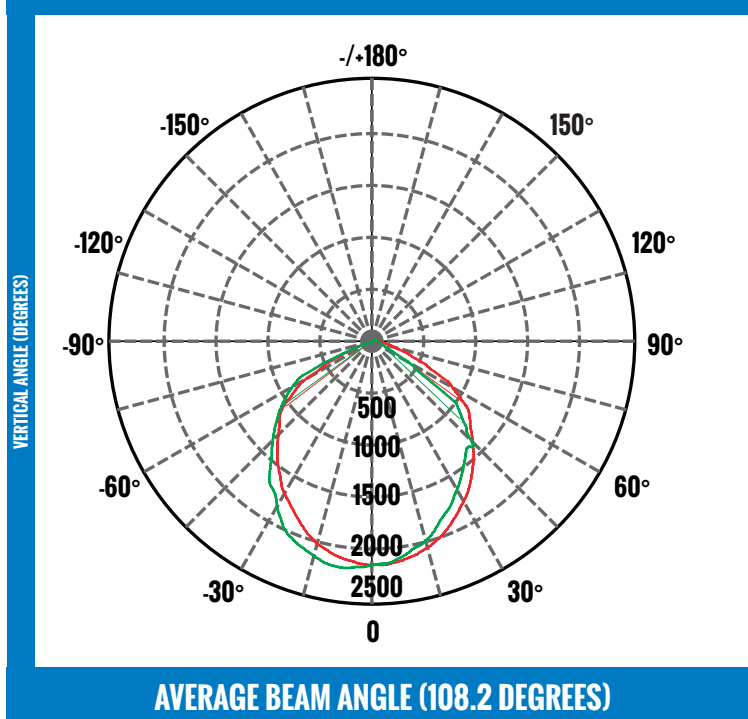
ALUMINUM BODY/BLACK

### CONTROL TYPE

NON-DIMMABLE

**PRODUCT CODE: FLM4-5035N-BL-YK LED FLOOD LIGHT/YOKE BRACKET**
**LUMINAIRE PHOTOMETRIC (TEST REPORT)**
**ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 4107LM**

3.28FT 1M	690.1,2120LX		8.83FT 2.69M
6.56FT 2M	172.5,530.1LX		17.65FT 5.38M
9.84FT 3M	76.68,235.6LX		26.48FT 8.07M
13.12FT 4M	43.13,132.5LX		35.30FT 10.76M
16.40FT 5M	27.60,84.82LX		44.13FT 13.45M
19.69FT 6M	19.17,58.90LX		52.95FT 16.14M
22.97FT 7M	14.08,43.27LX		61.78FT 18.83M
26.25FT 8M	10.78,33.13LX		70.60FT 21.52M
29.52FT 9M	8.520,26.18LX		79.46FT 24.22M
32.80FT 10M	6.901,21.20LX		88.29FT 26.91M
<b>HT</b>	<b>EAVG/EMAX</b>	<b>ANGLE: 106.75DEG</b>	<b>DIA</b>

**ISOCANDELA DIAGRAM (PERCENT OF MAXIMUM INTENSITY)**

**CERTIFICATIONS**

**DRIVER/LED CHIP**

**ORDERING INFORMATION - FL4 SERIES**

SERIES	SIZE	DLC TYPE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	FINISH	BRACKET
E.G. FL	M	4	50	3	5	N	BL	YK
FL - FLOOD LIGHT	M - MEDIUM	4 - DLC4.0	50 - 50W	3 - 347V	5-5000K	N - NO	BL - BLACK	YK - YOKE
								BRACKET

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com