

SAVE THESE INSTRUCTIONS - READ ALL INSTRUCTIONS CAREFULLY

WARNING



PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION.

- To prevent personal injury or product damage only licensed electricians/personnel should install fixture.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For The installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- This product must be installed in accordance with the National Electric Code (NEC) and all applicable Federal, State/Provincial and Local Electric Codes and Safety Standards.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.


CAUTION:

- LED troffer are not suitable for use in wet locations.
- LED troffer are not suitable for covering with thermally insulating material.
- LED troffer can only be installed by a qualified electrician.
- Before installation or maintenance, please disconnect the power to prevent electric shock.
- Please keep the LED troffer away from any corrosive substance, and please use dry cloth when you clean it.


PRODUCT PARAMETERS

PART NO.	POWER	WORKING CURRENT	INPUT VOLTAGE	LUMINOUS EFFICACY	CCT	VIEWING ANGLE	RA	PF	DIMMABLE	WARRANTY
RTDIBS22-3354WC0	30W/35W/40W	0.367A	AC100-347V	125LM/W	3500K/4000K/5000K	120°	≥80	≥0.9	0-10V	5 YEARS
RTDIBS24-345WC0	30W/40W/50W	0.458A	AC100-347V	125LM/W	3500K/4000K/5000K	120°	≥80	≥0.9	0-10V	5 YEARS


INSTALLATION INSTRUCTION - (SAVE INSTRUCTIONS FOR FUTURE REFERENCE).

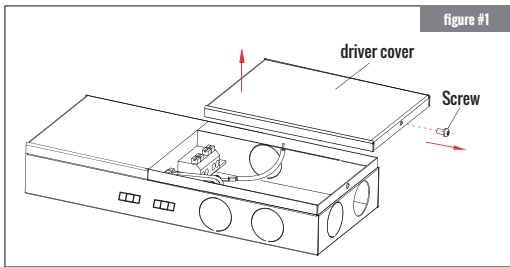


1. Unscrew the driver cover.

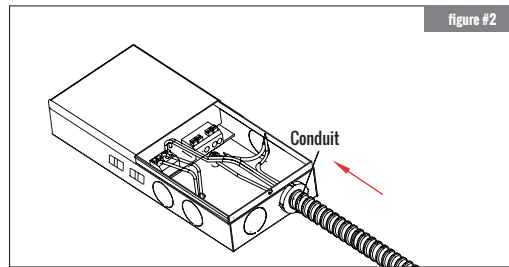


2. Connect the conduit to the driver box.

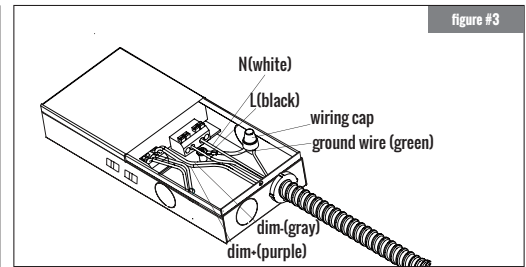


3. Connect other wires separately.

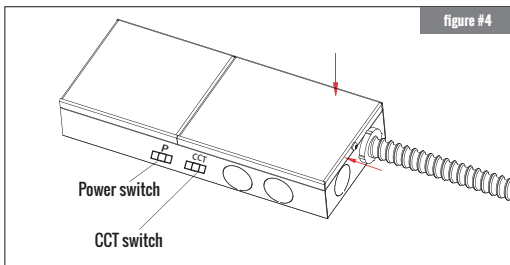

4. Put back the driver cover and fix it by screw. Select adjustable power and color temperature

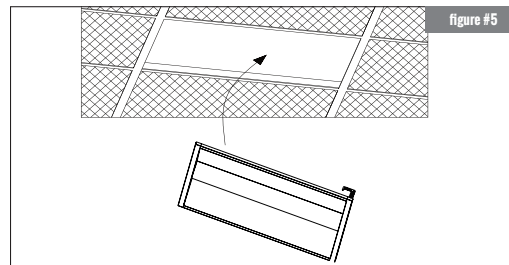

5. Replace existing lighting fixture from ceiling with LED Troffer.

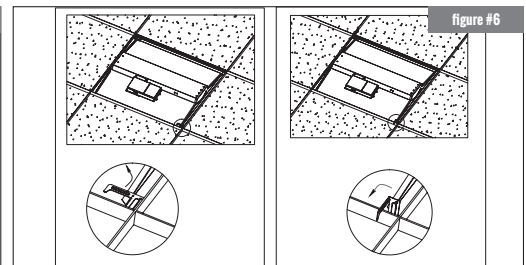

6. Use the protective brackets for safety.