


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

PRODUCT CODE: VPT-20U5N-FGR
LED VAPOR TIGHT WALL PACK/DECORATIVE
G14

VAPOR TIGHT

PRODUCT DESCRIPTION

The Etlin-Daniels VPT-20U5N-FGR Wall Mount LED Vapor Tight provides a high lumen solution for environments where protection from dust, moisture and physical shock is required. The rugged die-cast, rubber gasketed aluminum housing, along with a durable frosted glass enclosure provide a long-lasting housing with even illumination.

Both outdoor and indoor IP65 wet location rated with integrated wet location j-box and gasketed wall seal.

FEATURES


- LED Indoor & Outdoor Light Source (-40C rated)
- IP65 sealed die-casting aluminum housing
- Removeable screw plugs for easy access to wiring
- Wet location rated
- 5 year warranty.
- L70-50,000 hours
- DLC Standard

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	CRI	SYSTEM EFFICIENCY	VOLTAGE	POWER FREQ.	POWER FACTOR
3030	32 CHIPS	90LM/W	1800LM	5000K	150°	>70CRI	>90%	AC120V-277V	50-60HZ	>0.90

PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	INGRESS PROTECT	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE	
20W	DIE CAST ALUMINUM BODY WITH GLASS SHADE	IP65	>50,000 HOURS	-40°C~-40°C -40°F~-104°F	-40°C~-40°C -40°F~-104°F	4.61 X 7.53 X 11.99 INCHES (117 X 191.5 X 304.5 MM)	16.34 X 12.40 X 11.22 INCHES (415 X 315 X 285 MM)	

ADDITIONAL INFORMATION

INSTALLATION METHOD

WALL MOUNT

FIXTURE COLOR

GRAY POWDER PAINT FINISH

CONTROL TYPE


NON-DIMMABLE

CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		


MODEL: VPT-20U5N-FGR

LED VAPOR TIGHT WALL PACK/DECORATIVE

LUMINAIRE PHOTOMETRIC (TEST REPORT)

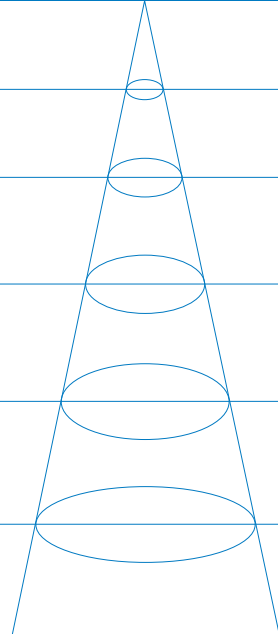17FT 5.182M	1.30FC		147.4FT
34FT 10.36M	0.33FC		294.8FT
51FT 15.54M	0.14FC		442.2FT
68FT 20.73M	0.08FC		589.7FT
85FT 25.91M	0.05FC		737.1FT
102FT 31.89M	0.04FC		884.5FT
HT	EAVG/EMAX	VERTICAL ANGLE: 140.70 DEG HORIZ. ANGLE: 154.0 DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

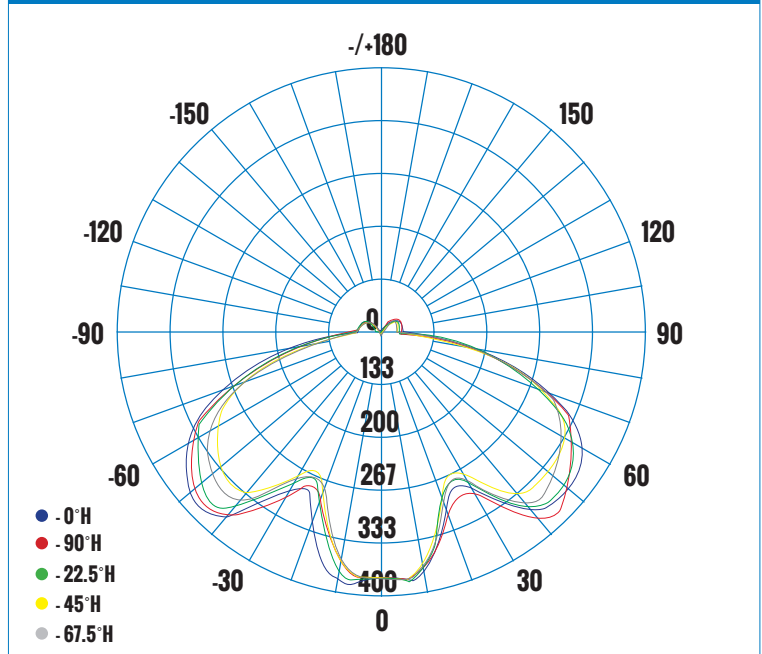

CERTIFICATIONS



ORDERING INFORMATION - VPT SERIES

SERIES	WATTS	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	LENS	FINISH
E.G. VPT	20	U	5	N	F	GR
VPT - VAPORTITE	20 - 20W	U - 120-277V	5 - 5000K	N - NO	F - FROSTED	GR - GRAY

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com