
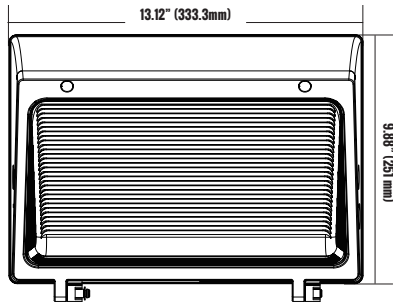


PRODUCT CODE: WP5M-4060-W40-CD
MULTI-WATTAGE 40W / 60W LED WALL PACK


PRODUCT DESCRIPTION

Etlin-Daniels new generation of WP5M LED Classic Wall Packs offer an easy to install, high efficacy option to either replace existing and inefficient HID wall packs, or for your new construction projects. Available in both 4000K & 5000K, in 120-347V, the WP5M series features a Wattage Selection Switch. On the lower wattage design, you can adjust between 40W & 60W. On the higher wattage design, you can adjust between 80W, 100W and 120W. Both wattage designs use the same size housing which allows for only one Wire Guard option as well as only one Dark Sky Compliant Shield option. The durable heavy-duty die-cast aluminum body and impact resistant, high efficiency borosilicate glass refractor provide a maintenance-free, safe perimeter environment for commercial, industrial, healthcare, residential, retail and hospitality properties. For further energy savings, take advantage of the 0-10V Continuous Dimming option.

FEATURES

- Outdoor LED Light Source.
- Light weight, heavy duty die-cast aluminum body with rust and corrosion-free powder coat finish
- High efficiency impact-resistant borosilicate glass refractor with wide beam pattern
- Wattage Selectable Switch - 40W/60W & 80W/100W/120W
- Easy to install surface mount options
- 0-10V Continuous Dimming
- IP65 Wet Location rated
- Dark Sky compliant shield and wire guard available
- 5 year warranty
- L70 - 50,000 hours
- DLC Premium

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	CRI	VOLTAGE	POWER FREQ.	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
LUMILEDS	225 CHIPS	144.42 LM/W 137.32 LM/W	5776LM 8239LM	4000K	90° x 100°	>80CRI	120 - 347V	50-60HZ	>90%	>0.90	<20%

PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	INGRESS PROTECT	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
40W / 60W	ALUMINUM/ BOROSILICATE OPTICAL LENS INCLUDED	IP65	>50,000 HOURS	- 40° C--70° C - 40° F--158° F	- 40° C--45° C - 40° F--113° F	13.11 X 9.88 X 5.22 INCHES (333 X 251 X 132 MM)	15.66 X 12.59 X 8.18 INCHES (398 X 320 X 208MM)



ADDITIONAL INFORMATION

INSTALLATION METHOD

WALL MOUNT

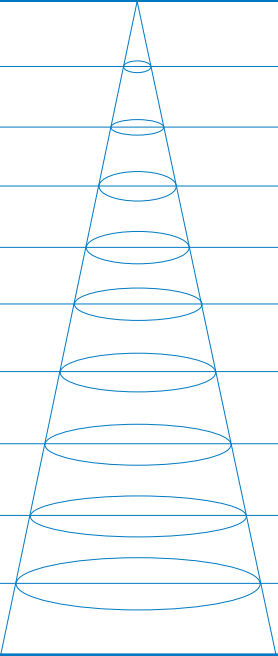
FIXTURE COLOR

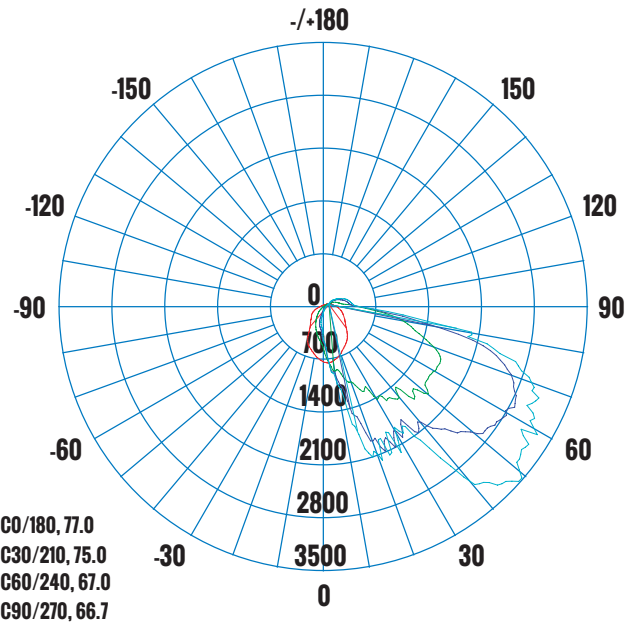
DARK BRONZE FINISH

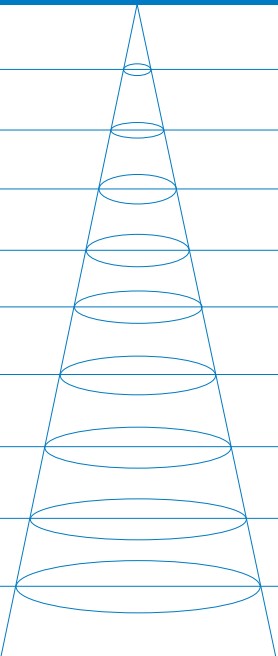
CONTROL TYPE

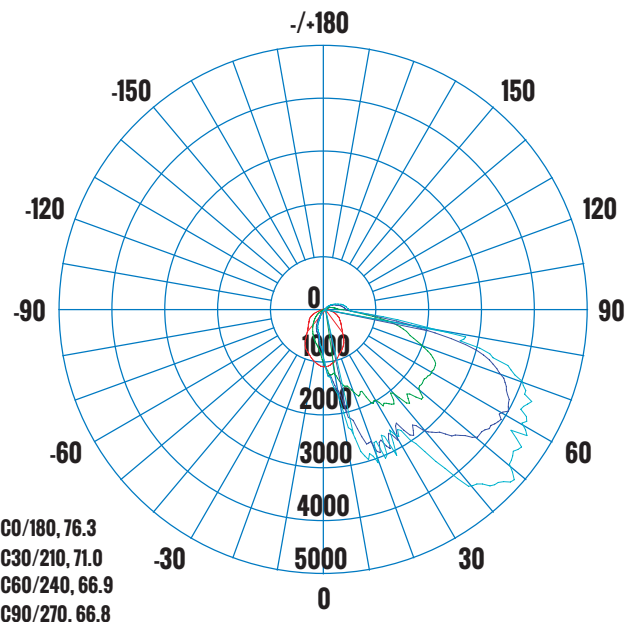
0 - 10V CONTINUOUS DIMMING

PRODUCT CODE: WP5M-4060-W40-CD
MULTI-WATTAGE 40W / 60W LED WALL PACK
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 40W
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 1001LM

10FT 3.048M	75.38, 203.6LX		13.20FT 402.29CM
12FT 3.658M	52.35, 141.4LX		15.83FT 482.75CM
16FT 4.877M	29.45, 79.53LX		21.11FT 643.66CM
20FT 6.096M	18.85, 50.90LX		26.39FT 804.58CM
30FT 9.14M	8.376, 22.62LX		39.6FT 1206.87CM
35FT 10.67M	6.153, 16.62LX		46.19FT 1408.01CM
40FT 12.19M	4.711, 12.73LX		52.79FT 1609.16CM
45FT 13.72M	3.722, 10.05LX		59.39FT 1810.30CM
50FT 15.24M	3.015, 8.144LX		65.99FT 2011.45CM
55FT 16.76M	2.492, 6.731LX		72.59FT 2212.59CM
HT	EAVG/EMAX	ANGLE: 66.84DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 71.4DEG
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 60W
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 1420LM

10FT 3.048M	106.9, 288.8LX		13.22FT 403.13CM
12FT 3.658M	74.24, 200.5LX		15.87FT 483.76CM
16FT 4.877M	41.76, 112.8LX		21.16FT 645.01CM
20FT 6.096M	26.73, 72.19LX		26.45FT 806.26CM
30FT 9.14M	11.88, 32.08LX		39.67FT 1209.39CM
35FT 10.67M	8.727, 23.57LX		46.29FT 1410.95CM
40FT 12.19M	6.682, 18.05LX		52.90FT 1612.52CM
45FT 13.72M	5.279, 14.26LX		59.51FT 1814.08CM
50FT 15.24M	4.276, 11.55LX		66.13FT 2015.65CM
55FT 16.76M	3.534, 9.546LX		72.74FT 2217.21CM
HT	EAVG/EMAX	ANGLE: 66.95DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 70.3DEG

PRODUCT CODE: WP5M-4060-W40-CD

MULTI-WATTAGE 40W / 60W LED WALL PACK

CERTIFICATIONS



CAN ICES-005 (B) / NMB-005 (B)


DRIVER/LED CHIP

LUMILEDS

ACCESSORIES



**VISOR PART#:
WP5M-RF-DB**



**WIRE GUARD PART#:
WP5M-WG-DB**

ORDERING INFORMATION - WP5M SERIES

SERIES	DLC TYPE	SIZE	WATTS	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	LENS	FINISH
E.G. WP	5	M	4060	W	4	0	C	D
WP - WALL PACK	5 - DLC	M - MEDIUM	4060 - 40W / 60W	W - 120 - 347V	4 - 4000K	0 - 10V CONTINUOUS DIMMING	C - CLEAR	D - DARK BRONZE

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com