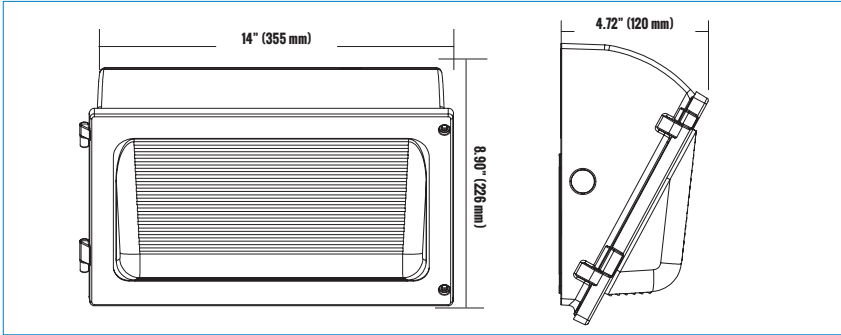


PRODUCT CODE: WP5M-M120WCOP-CD

MULTI-WATTAGE & 3CCT LED WALL PACK WITH PHOTOCEL



PRODUCT DESCRIPTION

Etlin-Daniels newest generation of WP5M-M series LED Classic Wall Packs offer an easy to install and high efficiency solution to replace inefficient HID wall packs, or for new construction projects. Available with Multi-Wattage and 3CCT switching, in 120-347V, both available products are the same size housing, allowing for reduced accessories. One Dark Sky Compliant Shield option and one wire guard option.

The durable, ultra-slim die-cast classic housing comes with 4 available 1/2" conduit hubs: 1 on the back, 1 on each side and one on the bottom. The Borosilicate glass lens diffuses the light source providing uniform distribution. There is a built-in DC photocell which can be disabled, and the IP65 Wet Location rating allows for secure performance over the long fixture life.

For extra energy savings, take advantage of the 0-10V Continuous Dimming. The WP5M-M series is the perfect option for commercial, industrial, healthcare, residential, retail and hospitality facilities.

FEATURES

- Outdoor LED Light Source.
- Light weight, ultra-slim heavy duty die-cast aluminum body
- High efficiency impact resistant Borosilicate glass refractor for uniform illumination
- Wattage selectable switch - 72W / 96W / 120W.
- 3CCT switch - 3000K / 4000K / 5000K
- 120-347V
- Easy to install housing with spider pattern knockouts
- IP65 Wet Location rated
- 0-10V Continuous Dimming
- Dark Sky Compliant Shield and Wire Guard available
- 5 year warranty
- L70 - 50,000 hours
- DLC 5.1 Premium

PRODUCT SPECIFICATIONS (OPTICAL DATA) PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	WATTAGE	COLOR TEMPERATURE	LUMENS	SYSTEM EFFICACY	CRI	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
LUMILED	336 CHIPS	72W - 3000K - 9348 LM / 4000K - 10052 LM / 5000K - 9807 LM 96W - 3000K - 11689 LM / 4000K - 12723 LM / 5000K - 12297 LM 120W - 3000K - 13878 LM / 4000K - 15472 LM / 5000K - 14865 LM			125 - 135 LM / W	>70 CRI	>86%	>0.95	<20%

PRODUCT SPECIFICATIONS

VOLTAGES	POWER FREQ.	FIXTURE MATERIAL	INGRESS PROTECT	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
120-347V	50-60HZ	ALUMINUM / BOROSILICATE GLASS LENS INCLUDED	IP65	>50,000 HOURS	-40°C ~ +45°C -40°F ~ +113°F	-40°C ~ +45°C -40°F ~ +113°F	14 X 8.9 X 4.72 INCHES (355 X 226 X 120 MM)	15.95 X 11.61 X 7.67 INCHES (405 X 295 X 195 MM)

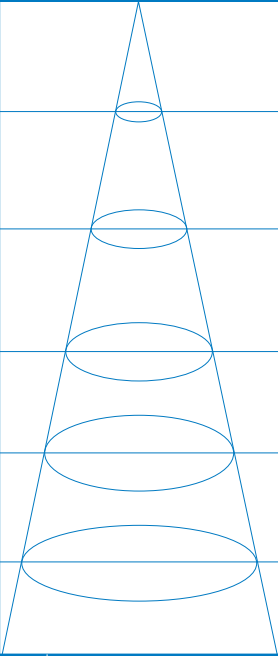
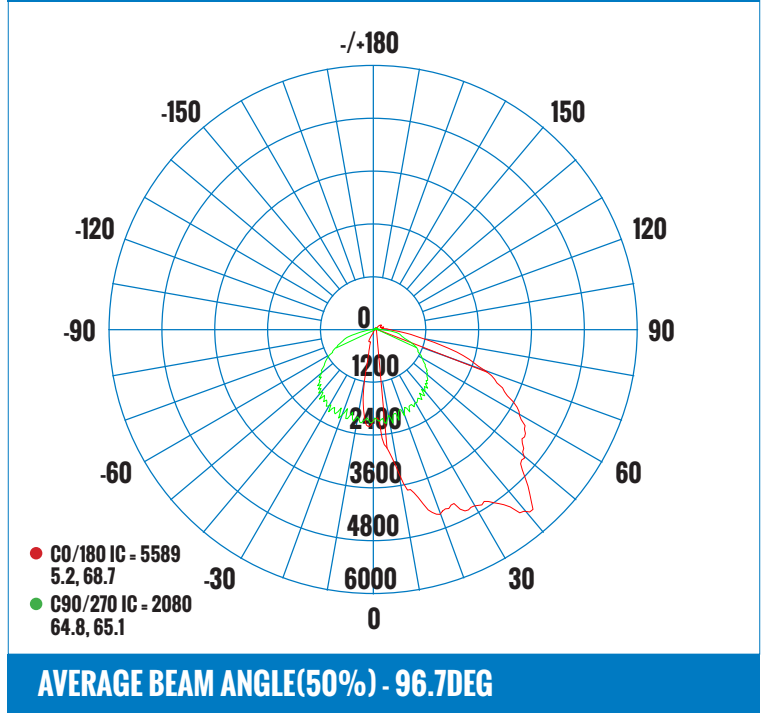


ADDITIONAL INFORMATION

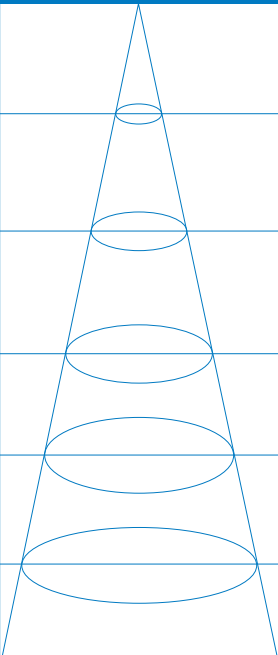
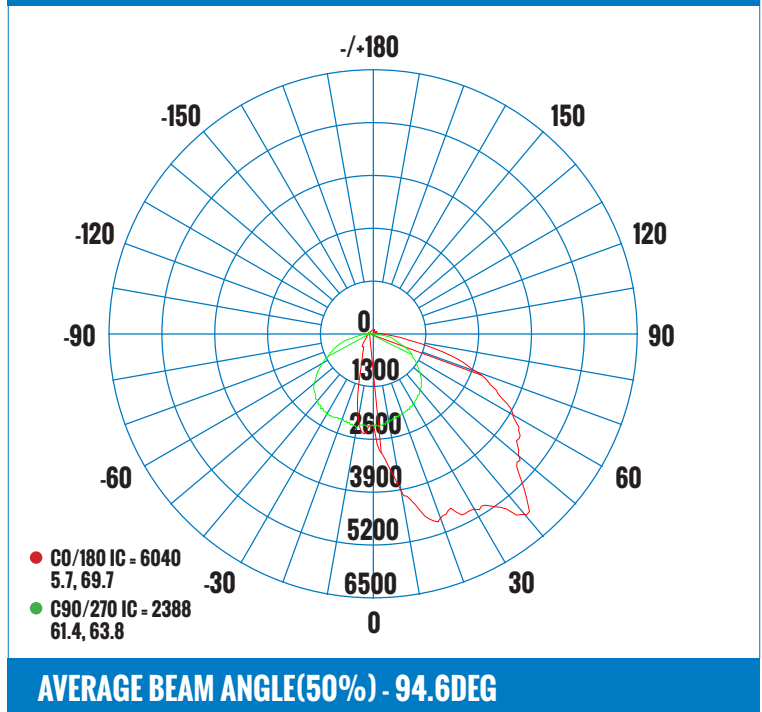
INSTALLATION METHOD	FIXTURE COLOR	CONTROL TYPE
WALL MOUNT	DARK BRONZE	PHOTOCELL 0-10V CONTINUOUS DIMMING

PRODUCT CODE: WP5M-M120WCOP-CD
MULTI-WATTAGE & 3CCT LED WALL PACK WITH PHOTOCEL
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 72W 3000K

ILLUMINANCE (AT A DISTANCE) -		VERT BEAM	HORIZ BEAM
8.3FT 2.52M	35.4FC	10.4FT	15.9FT
16.7FT 5.09M	8.74FC	20.8FT	32.0FT
25.0FT 7.62M	3.90FC	31.2FT	48.0FT
33.3FT 10.15M	2.20FC	41.5FT	63.9FT
41.7FT 12.71M	1.40FC	52.0FT	80.0FT
50.0FT 15.24M	0.98FC	62.4FT	95.9FT
HT	EAVG/EMAX	VERT SPREAD: 63.9DEG HORI SPREAD: 87.6DEG	DIA

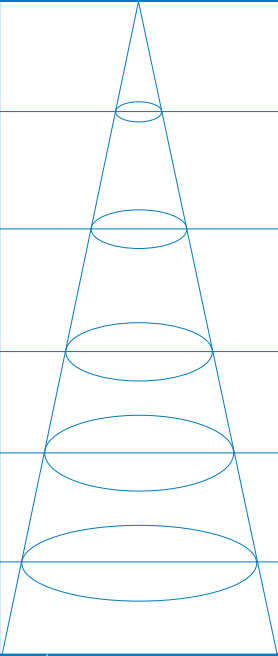
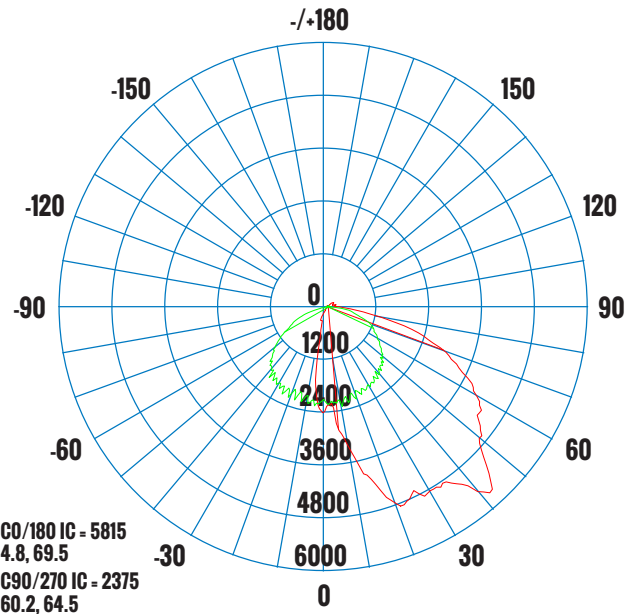

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

LUMINAIRE PHOTOMETRIC (TEST REPORT) - 72W 4000K

ILLUMINANCE (AT A DISTANCE) -		VERT BEAM	HORIZ BEAM
8.3FT 2.52M	38.4FC	10.4FT	16.1FT
16.7FT 5.09M	9.47FC	20.9FT	32.3FT
25.0FT 7.62M	4.23FC	31.3FT	48.4FT
33.3FT 10.15M	2.38FC	41.7FT	64.5FT
41.7FT 12.71M	1.52FC	52.2FT	80.8FT
50.0FT 15.24M	1.06FC	62.6FT	96.9FT
HT	EAVG/EMAX	VERT SPREAD: 64.1DEG HORI SPREAD: 88.2DEG	DIA

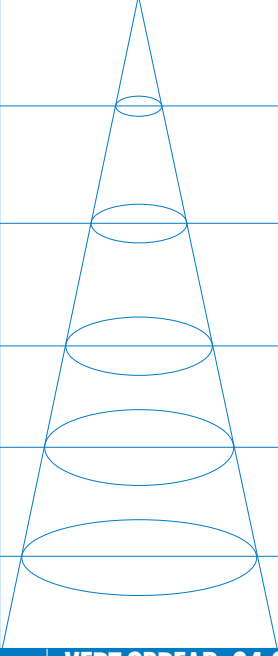
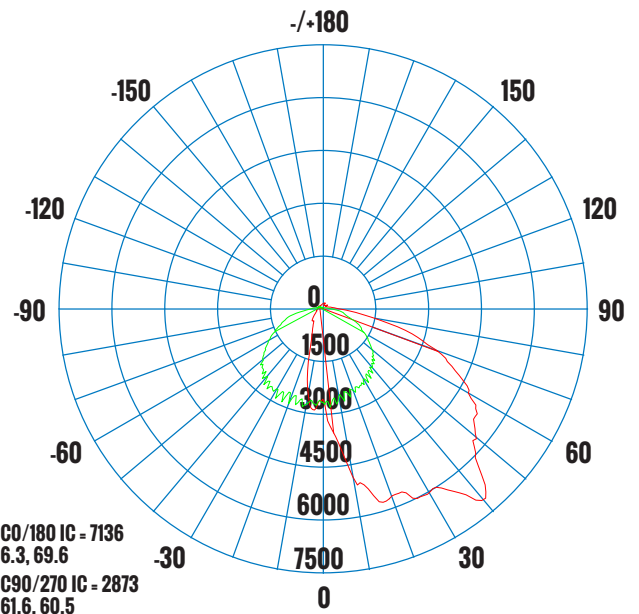

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM


PRODUCT CODE: WP5M-M120WCOP-CD
MULTI-WATTAGE & 3CCT LED WALL PACK WITH PHOTOCEL
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 72W 5000K

ILLUMINANCE (AT A DISTANCE) -		VERT BEAM	HORIZ BEAM
8.3FT 2.52M	37.4FC	10.5FT	16.3FT
16.7FT 5.09M	9.23FC	21.1FT	32.7FT
25.0FT 7.62M	4.12FC	31.6FT	49.0FT
33.3FT 10.15M	2.32FC	42.0FT	65.3FT
41.7FT 12.71M	1.48FC	52.6FT	81.7FT
50.0FT 15.24M	1.03FC	63.1FT	98.0FT
HT	EAVG/EMAX	VERT SPREAD: 64.5DEG HORI SPREAD: 88.8DEG	
		DIA	

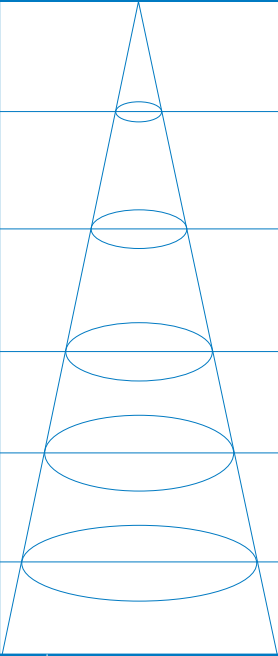
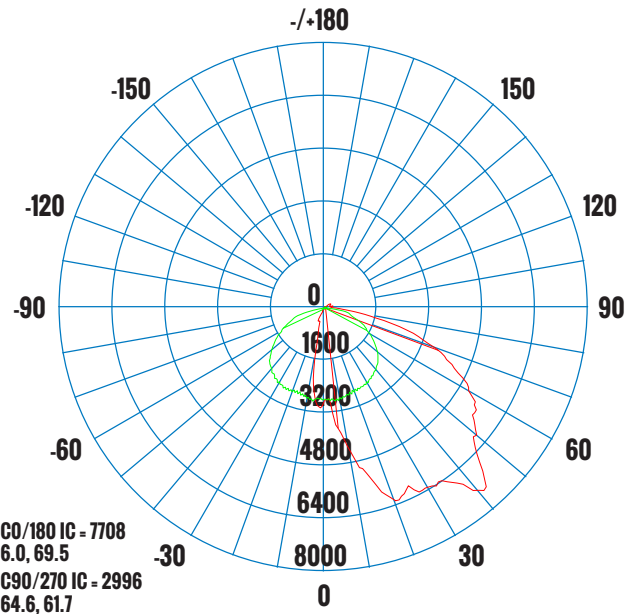

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 94.7DEG
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 96W 3000K

ILLUMINANCE (AT A DISTANCE) -		VERT BEAM	HORIZ BEAM
8.3FT 2.52M	43.1FC	10.4FT	15.9FT
16.7FT 5.09M	10.6FC	20.9FT	32.1FT
25.0FT 7.62M	4.75FC	31.2FT	48.0FT
33.3FT 10.15M	2.68FC	41.6FT	64.0FT
41.7FT 12.71M	1.71FC	52.1FT	80.1FT
50.0FT 15.24M	1.19FC	62.4FT	96.0FT
HT	EAVG/EMAX	VERT SPREAD: 64.0DEG HORI SPREAD: 87.7DEG	
		DIA	

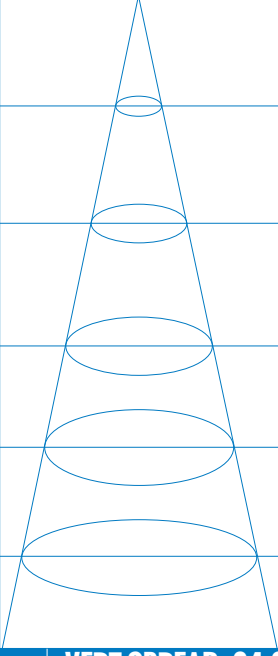
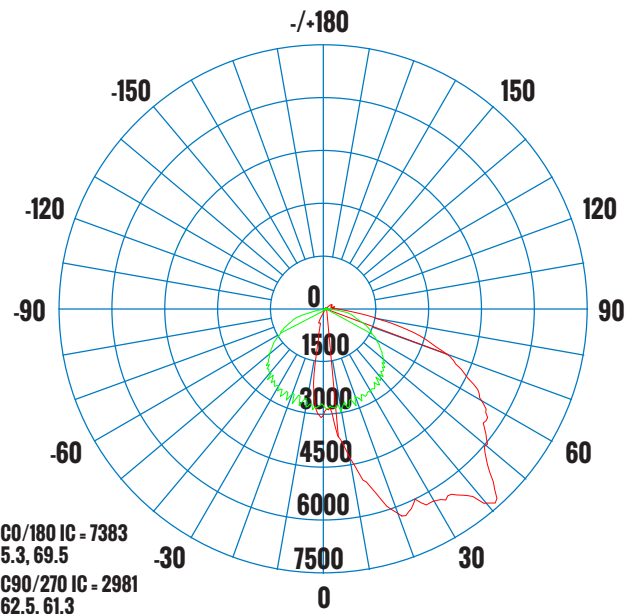

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 92.7 DEG

PRODUCT CODE: WP5M-M120WCOP-CD
MULTI-WATTAGE & 3CCT LED WALL PACK WITH PHOTOCEL
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 96W 4000K

ILLUMINANCE (AT A DISTANCE) -		VERT BEAM	HORIZ BEAM
8.3FT 2.52M	48.4FC	10.4FT	16.1FT
16.7FT 5.09M	12.0FC	20.9FT	32.3FT
25.0FT 7.62M	5.34FC	31.3FT	48.4FT
33.3FT 10.15M	3.01FC	41.7FT	64.4FT
41.7FT 12.71M	1.92FC	52.2FT	80.7FT
50.0FT 15.24M	1.33FC	62.6FT	96.7FT
HT	EAVG/EMAX	VERT SPREAD: 64.1DEG HORI SPREAD: 88.1DEG	
		DIA	

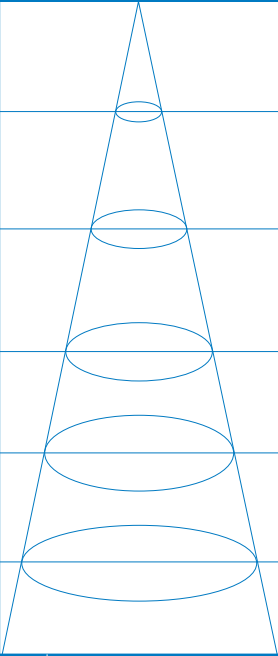
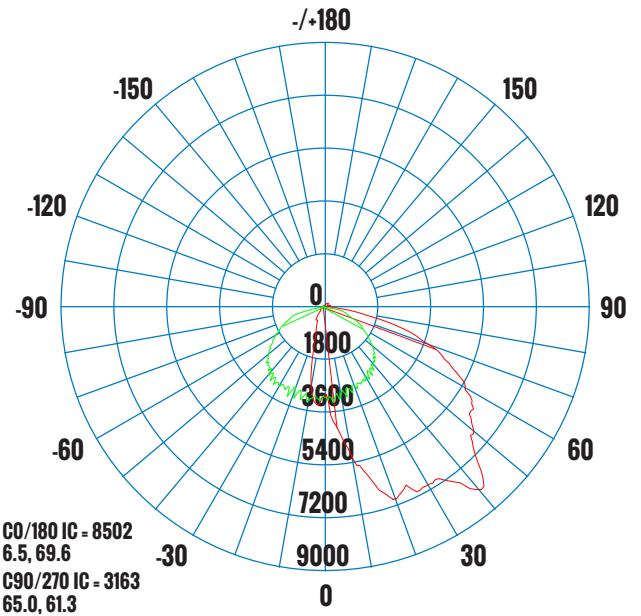

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 94.9 DEG
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 96W 5000K

ILLUMINANCE (AT A DISTANCE) -		VERT BEAM	HORIZ BEAM
8.3FT 2.52M	46.6FC	10.4FT	16.2FT
16.7FT 5.09M	11.5FC	21.0FT	32.7FT
25.0FT 7.62M	5.13FC	31.4FT	48.9FT
33.3FT 10.15M	2.89FC	41.8FT	65.2FT
41.7FT 12.71M	1.84FC	52.4FT	81.6FT
50.0FT 15.24M	1.28FC	62.8FT	97.8FT
HT	EAVG/EMAX	VERT SPREAD: 64.3DEG HORI SPREAD: 88.8DEG	
		DIA	

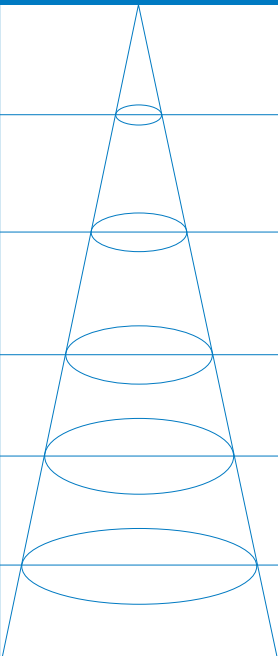
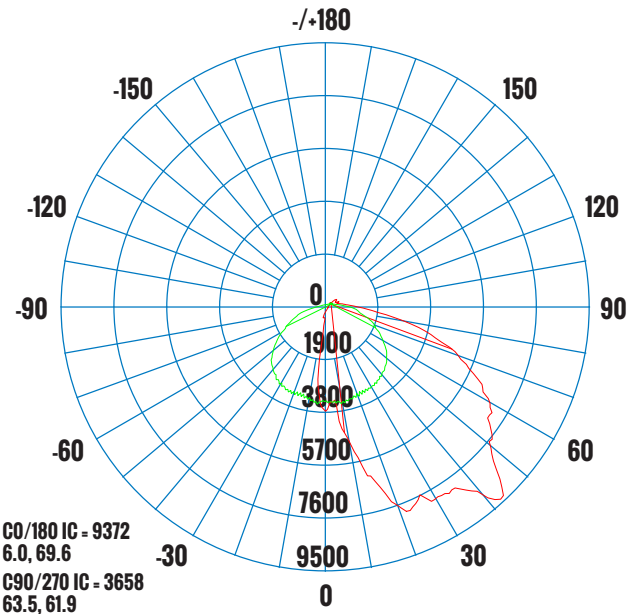

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 94.0 DEG

PRODUCT CODE: WP5M-M120WCOP-CD
MULTI-WATTAGE & 3CCT LED WALL PACK WITH PHOTOCEL
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 120W 3000K

ILLUMINANCE (AT A DISTANCE) -		VERT BEAM	HORIZ BEAM
8.3FT 2.52M	51.1FC	10.4FT	15.9FT
16.7FT 5.09M	12.6FC	20.8FT	32.0FT
25.0FT 7.62M	5.63FC	31.2FT	48.0FT
33.3FT 10.15M	3.17FC	41.5FT	63.9FT
41.7FT 12.71M	2.02FC	52.0FT	80.0FT
50.0FT 15.24M	1.41FC	62.4FT	95.9FT
HT	EAVG/EMAX	VERT SPREAD: 63.9DEG HORI SPREAD: 87.6DEG	
		DIA	


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 94.7 DEG
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 120W 4000K

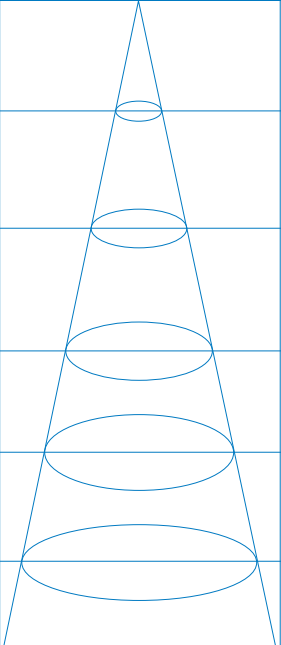
ILLUMINANCE (AT A DISTANCE) -		VERT BEAM	HORIZ BEAM
8.3FT 2.52M	57.4FC	10.4FT	16.0FT
16.7FT 5.09M	14.2FC	21.0FT	32.2FT
25.0FT 7.62M	6.33FC	31.4FT	48.2FT
33.3FT 10.15M	3.57FC	41.8FT	64.2FT
41.7FT 12.71M	2.28FC	52.4FT	80.5FT
50.0FT 15.24M	1.58FC	62.8FT	96.5FT
HT	EAVG/EMAX	VERT SPREAD: 64.2DEG HORI SPREAD: 87.9DEG	
		DIA	


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 94.5 DEG

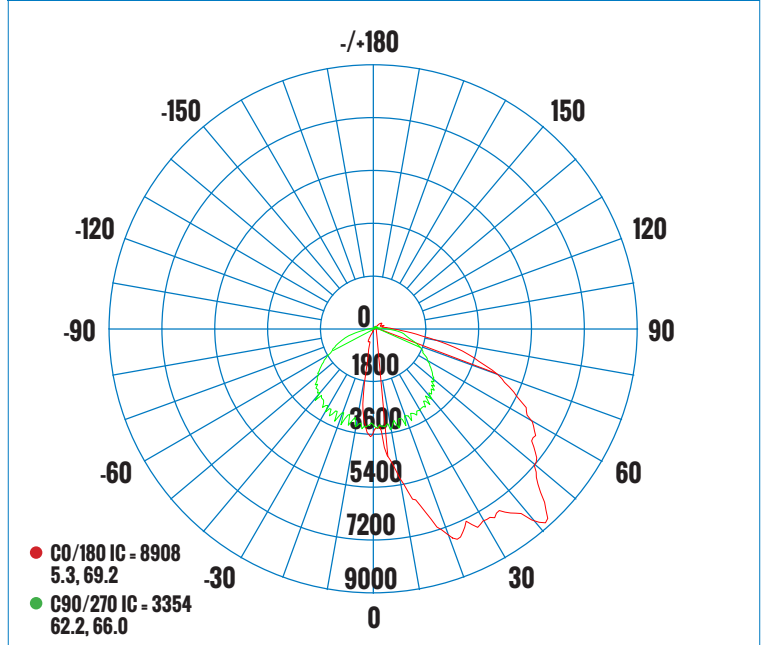
PRODUCT CODE: WP5M-M120WCOP-CD

MULTI-WATTAGE & 3CCT LED WALL PACK WITH PHOTOCEL

LUMINAIRE PHOTOMETRIC (TEST REPORT) - 120W 5000K

ILLUMINANCE (AT A DISTANCE) -			VERT BEAM	HORIZ BEAM
8.3FT 2.52M	55.8FC		10.5FT	16.2FT
16.7FT 5.09M	13.8FC		21.1FT	32.5FT
25.0FT 7.62M	6.15FC		31.6FT	48.7FT
33.3FT 10.15M	3.47FC		42.0FT	64.9FT
41.7FT 12.71M	2.21FC		52.6FT	81.2FT
50.0FT 15.24M	1.54FC		63.1FT	97.4FT
HT	EAVG/EMAX	VERT SPREAD: 64.5DEG HORI SPREAD: 88.5DEG	DIA	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



AVERAGE BEAM ANGLE(50%) - 96.1 DEG

CERTIFICATIONS



CAN ICES-005 (B) / NMB-005 (B)

DRIVER/LED CHIP

ACCESSORIES



VISOR PART#:
WP5M-M-RF-DB



WIRE GUARD PART#:
WP5M-M-WG-DB

ORDERING INFORMATION - WP5M SERIES

SERIES	WATTS	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	PHOTOCELL	LENS	FINISH
E.G. WP5M	M120	W	C	O	P	C	D
WP5M - WALL PACK	M120 -	W - 120 - 347V	C - CHANGEABLE COLOR TEMP.	O - 0 - 10V	P - PHOTOCELL	C - CLEAR	D - DARK BRONZE
MEDIUM, DLC	MULTI WATTAGE		- 3000K / 4000K / 5000K	CONTINUOUS	INSTALLED		
	120W MAX			DIMMING			

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com