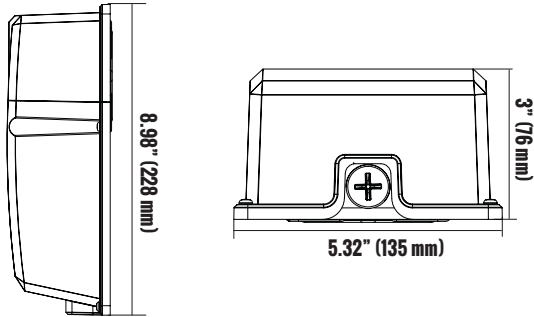


PRODUCT CODE: WPS14-U4N-FD-PC
14W LED WALL PACK/BUILT-IN PHOTOCELL


PRODUCT DESCRIPTION

The new Etlin-Daniels WPS14-U4N-FD-PC LED Mini Wall Pack is the perfect partner for our successful WPS20 model. The frosted lens provides striation-free illumination and the built-in photocell allows for maintenance-free operation.

The WPS14 is the perfect answer for commercial, industrial and multi-res wall wash applications. Whether you are replacing inefficient incandescent, CFL or HID fixtures, or working on a new build, the easy to install WPS14 will provide a safe and energy efficient environment.

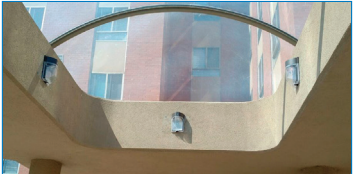
FEATURES

- Outdoor LED Light Source
- Sealed die-cast aluminum housing - built-in photocell
- Junction-box or wall-mount ready
- IP65 - Wet location Rated
- Non-dimmable
- 5 year warranty
- L70 - 50,000 hrs
- DLC Standard

PRODUCT SPECIFICATIONS (OPTICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	CRI	VOLTAGE	POWER FREQ.	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
2835 SMD	48 CHIPS	110LM/W	1540LM	4000K	90° X 100°	>80CRI	AC120V~277V	50 / 60HZ	85%	0.9	<20%

PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	INGRESS PROTECT	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE	
14W	ALUMINUM/ POLYCARBONATE OPTICAL LENS	IP65	>50,000 HOURS	-30°C~+50°C -22°F~+122°F	-20°C~+40°C -4°F~+104°F	5.32 X 3 X 8.98 INCHES (135 X 76 X 228 MM)	9.25 X 5.59 X 3.30 INCHES (235 X 142 X 84MM)	

ADDITIONAL INFORMATION

INSTALLATION METHOD

WALL MOUNT

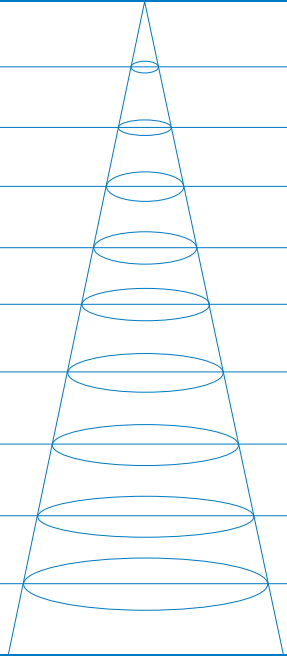
FIXTURE COLOR

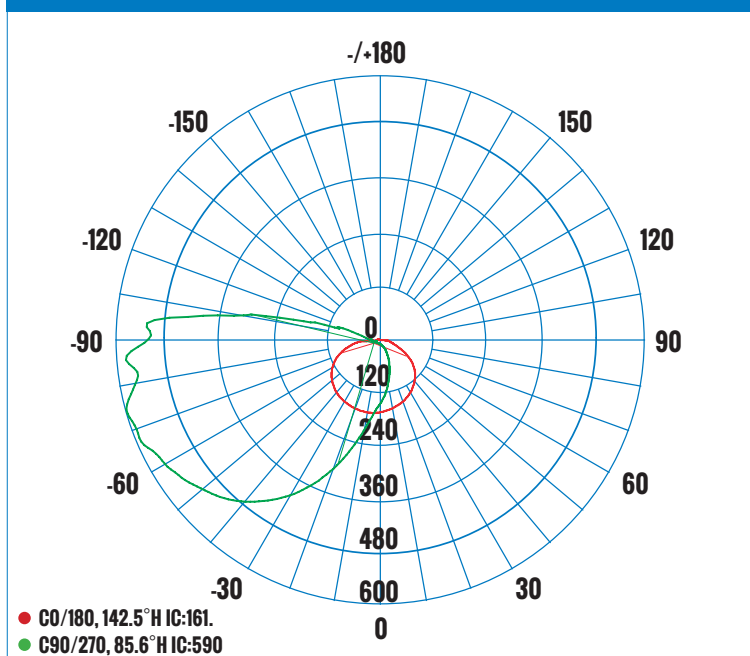
DARK BRONZE FINISH

CONTROL TYPE

NON-DIMMABLE

PRODUCT CODE: WPS14-U4N-FD-PC
14W LED WALL PACK/BUILT-IN PHOTOCELL
LUMINAIRE PHOTOMETRIC (TEST REPORT)
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 329.0LM

3.28FT 1M	120.4, 274.1LX		6.07FT 1.85M
6.56FT 2M	30.11, 68.53LX		12.15FT 3.70M
9.84FT 3M	13.38, 30.46LX		18.22FT 5.55M
13.12FT 4M	7.52, 17.13LX		24.30FT 7.40M
16.40FT 5M	4.817, 10.97LX		30.38FT 9.26M
19.69FT 6M	3.345, 7.61LX		36.45FT 11.11M
22.97FT 7M	2.45, 5.59LX		42.53FT 12.96M
26.25FT 8M	1.882, 4.283LX		48.61FT 14.81M
29.52FT 9M	1.487, 3.384LX		54.68FT 16.66M
32.80FT 10M	1.204, 2.741LX		60.76FT 18.52M
HT	EAVG/EMAX	ANGLE: 85.60DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 114.0DEG
CERTIFICATIONS

DRIVER/LED CHIP

SMD

ORDERING INFORMATION - WPS18-U5N-FD-PC

SERIES	SIZE	WATTS	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	LENS	FINISH	FEATURES
E.G. WP	S	14	U	4	N	F	D	PC
WP - WALL PACK	S - SMALL	14 - 14W	U - 120-277V	4 - 4000K	N - NO	F - FROSTED	D - DARK BRONZE	PC - PHOTOCELL (INCLUDED)

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com