

INSTALLATION FOR RTBP5 SERIES

SAVE THESE INSTRUCTIONS - READ ALL INSTRUCTIONS CAREFULLY

WARNING




CAN ICES-005 (B) NMB-005 (B)

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION.

- Luminaire must be installed and serviced by a qualified electrician.
- This product must be installed in accordance to local and national electrical codes.
- For safe operation, please ensure luminaire is installed to the correct voltage, in accordance to these instructions.
- Please ensure that power is off at panel prior to installation or servicing. For servicing, please allow luminaire to cool prior to any maintenance.
- Do not install panel in an unstable ceiling, or near combustible materials.
- Do not modify the luminaire or change any components.
- Do not use luminaire under direct sunlight, high humidity, fog, rain, corrosive gas, dust or moisture.

WIRE DIAGRAM

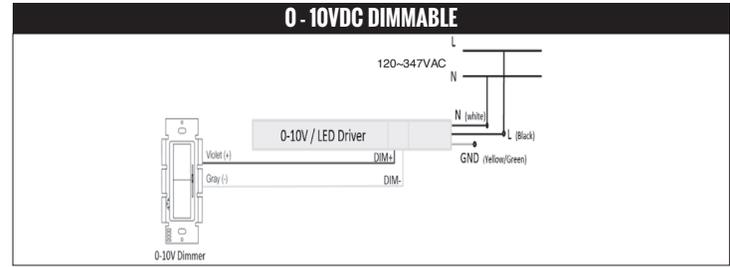

RECESSED INSTALLATION

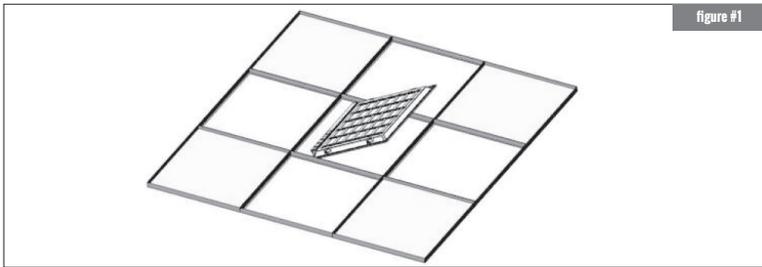


figure #1

1. Remove the ceiling tile at an appropriate location where the product is to be installed and raise the product above the bar.

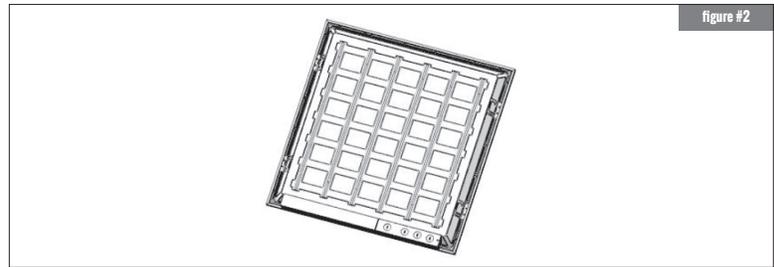


figure #2

2. With power turned off at the breaker, connect power to driver based on wiring diagram.

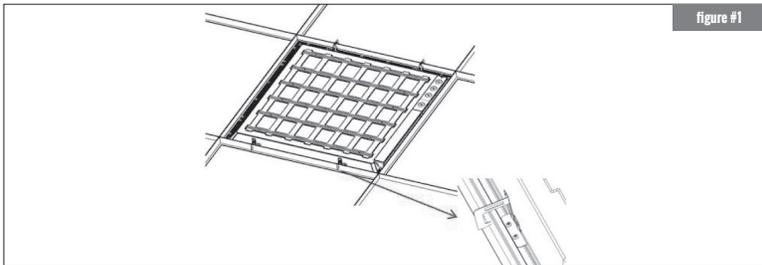


figure #1

3. Fold the 4 protection brackets so they will be above the T-bar, as shown.

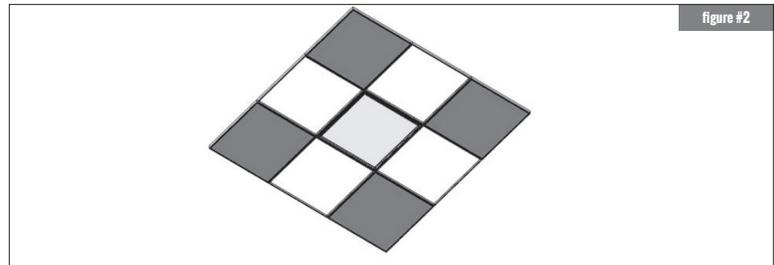


figure #2

4. Slowly rest the luminaire on the T-bar and make sure it fits appropriately.

SUSPENSION MOUNT INSTALLATION

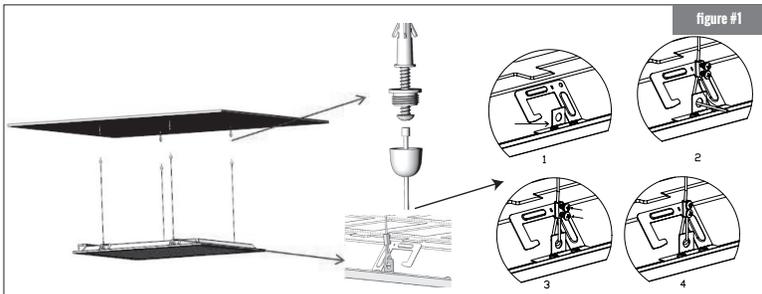


figure #1

1. Position the expanded screws at one end of the cable on the ceiling and hook the other end of cable on panel.


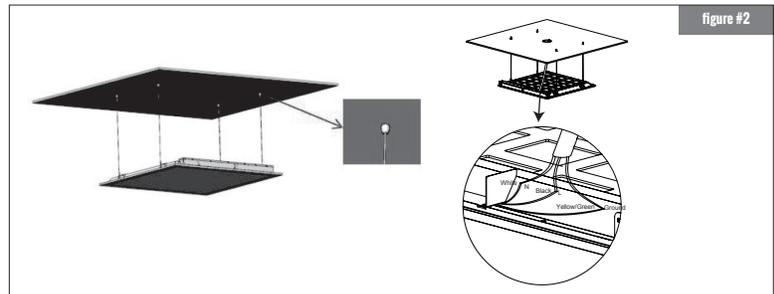


figure #2


2. Connect the screw cap to the expanded nut of the ceiling. With power turned off at the breaker, connect power to driver based on the wiring diagram to complete the installation.

INSTALLATION FOR RTBP5 SERIES


SAVE THESE INSTRUCTIONS - READ ALL INSTRUCTIONS CAREFULLY

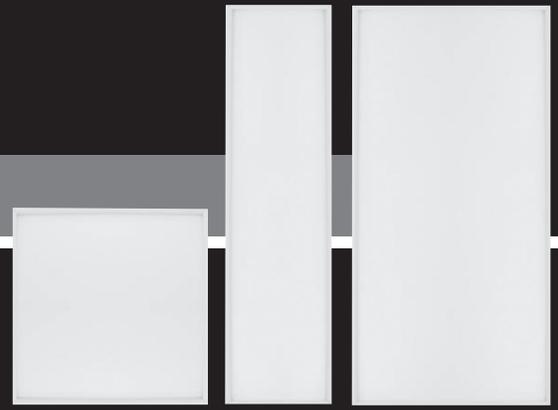


SURFACE MOUNT INSTALLATION

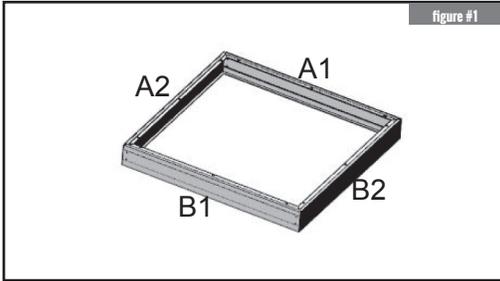

1. Fix A1/A2/B1/B2 with snap-in plastic comers making it a complete frame.

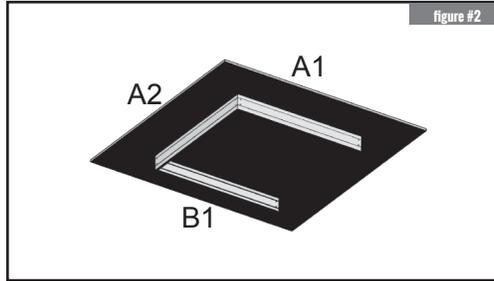


2. Fix the frame to ceiling with screws. Remove the B2 side of the Frame for luminaire installation.

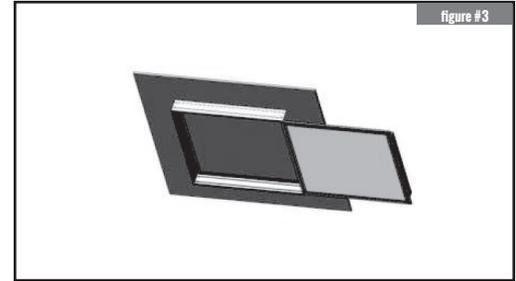

3. Slide partially the luminaire into the mounting frame, as shown. With power turned off at the breaker, connect power to drive based on the wiring diagram.



4. Push up luminaire the frame seamlessly.

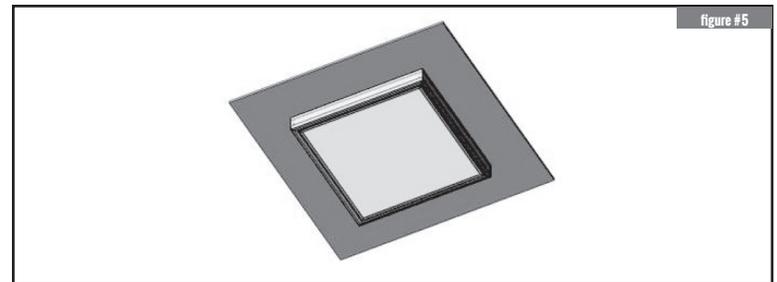

5. Screw up B2 with screws

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com