


PRODUCT CODE: FLH5S-M300WC0-5-PBS-DB

MULTI-WATTAGE COLOR SELECTABLE LED FLOOD LIGHT

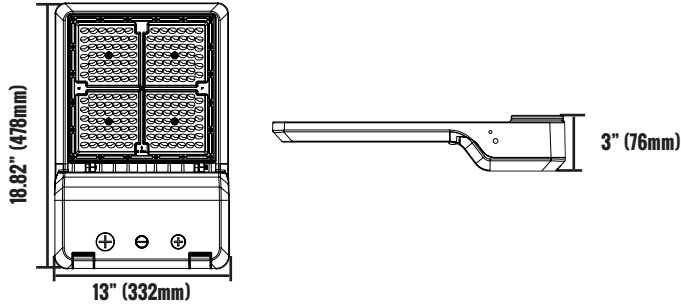

PRODUCT DESCRIPTION

Etlin-Daniels is pleased to introduce our FLH5S-M Series of High Wattage Flood / Shoebox LED fixtures. They are now equipped with many features that set the standard for flood lighting. The FLH5S-M150 has a switch that allows for choosing between 3 available wattages - 150W / 120W / 100W, and the FLH5S-M300 has 300W / 250W / 200W switching options. Both also offer 3CCT switching - 3000K, 4000K and 5000K, and come pre-equipped with 10kv Surge Protection, a 3 meter whip, Photocell Base pre-installed with a Shorting Cap, and Microwave Sensor Base pre-installed with an IP rated cap.

The newly designed and compact die-cast aluminum dark bronze frame provides for enhanced heat dissipation, while the high light transmittant polycarbonate lens provides a NEMA Type 5 distribution - optional NEMA Beam Patterns are also available as accessories. All fixtures are shipped without any mounting bracket installed - you can choose between a Yoke or Trunnion option along with a new Universal Mount that allows for Round or Square Pole Mount, along with a built-in Slipfitter function. For additional energy savings, you can take advantage of the 0-10V Continuous Dimming, and also, the available Microwave Sensor and Photocell options.

Typical applications on either pole or surface mounts to highlight signage, building facades, car dealerships, parking lots, parks and sports fields, storage yards and general area lighting.

FEATURES


- Outdoor LED Light Source
- IP65 Wet Location Rated
- 10kv Built-In Surge Protection
- Type 5 NEMA Distribution / other NEMA patterns available under FLH5S-M Accessories.
- 120-347V
- 3CCT - 3000K / 4000K / 5000K
- 3 Wattage Selectable - FLH5S-M300 - 300W / 250W / 200W
- Mounting Bracket Options - Trunnion, Yoke and Universal (Round or Square Pole and Slipfitter Function) brackets available
- 120-347V Photocell Base pre-installed with Shorting Cap
- 12V Microwave Sensor Base pre-installed with IP rated cap
- 0-10V Continuous Dimming
- 5 Year Warranty
- L70 - 50,000 hours
- DLC 5.1 Premium

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	WATTAGE	COLOR TEMPERATURE	LUMENS	SYSTEM EFFICACY	CRI	DISTRIBUTION PATTERN	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
SMD2835	728 CHIPS	200W - 3000K - 28745LM / 4000K - 31608LM / 5000K - 31165LM 250W - 3000K - 34622LM / 4000K - 38707LM / 5000K - 37525LM 300W - 3000K - 40312LM / 4000K - 46891LM / 5000K - 43573LM			120 - 150 LM/W	>80 CRI	TYPE 5	>86%	>0.90	<20%

PRODUCT SPECIFICATIONS

VOLTAGES	POWER FREQ.	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE	
120-347V	50-60HZ	DIE CAST ALUMINUM	>50,000 HOURS	-40°C~+75°C -40°F~+167°F	-35°C~+50°C -31°F~+122°F	18.82 X 13 X 3 INCHES (478 X 332 X 76 MM)	24.6 X 15 X 5.82 INCHES (625 X 380 X 148 MM)	

ADDITIONAL INFORMATION

INSTALLATION METHOD

POLE / WALL MOUNT

FIXTURE COLOR

DARK BRONZE

CONTROL TYPE

0-10V DIMMABLE


PRODUCT CODE: FLH5S-M300WC0-5-PBS-DB

MULTI-WATTAGE COLOR SELECTABLE LED FLOOD LIGHT




LUMINAIRE PHOTOMETRIC (TEST REPORT) - 200W 3000K

MAX INTENSITY CONE SURFACE DISTRIBUTION DIAGRAM

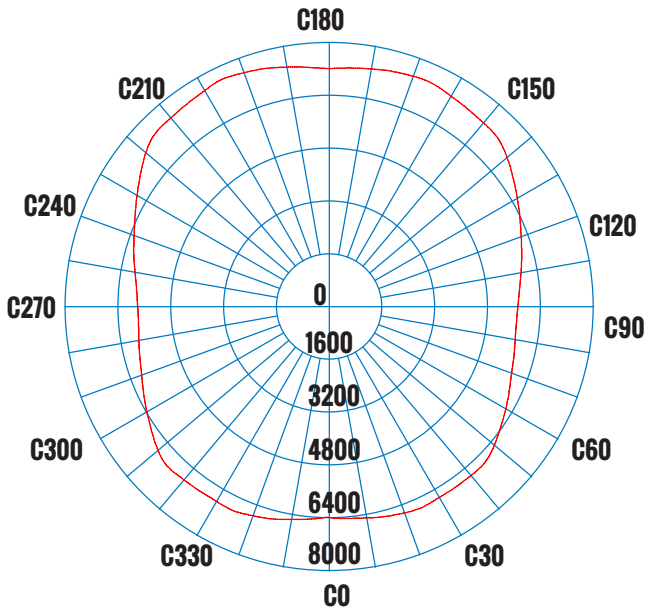

HOUSE SIDE MAX γ = 54.0 DEG STREET SIDE


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

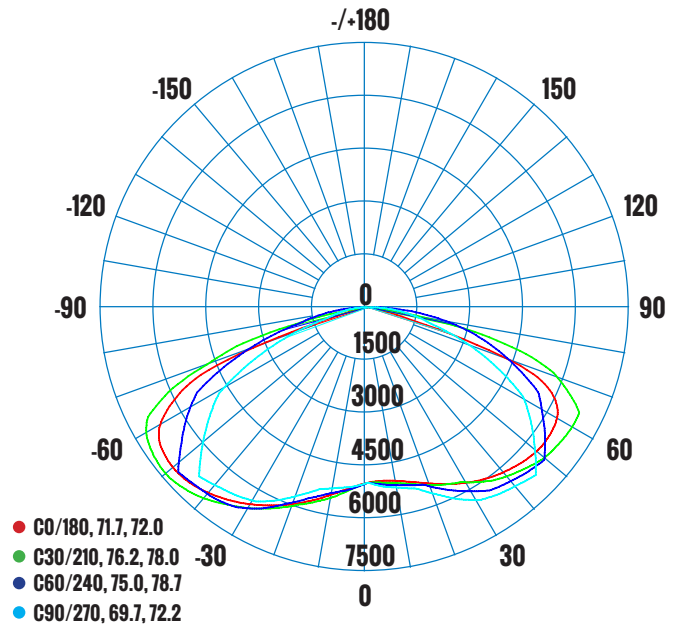

AVERAGE BEAM ANGLE(50%) - 148.4 DEG


LUMINAIRE PHOTOMETRIC (TEST REPORT) - 200W 4000K

MAX INTENSITY CONE SURFACE DISTRIBUTION DIAGRAM

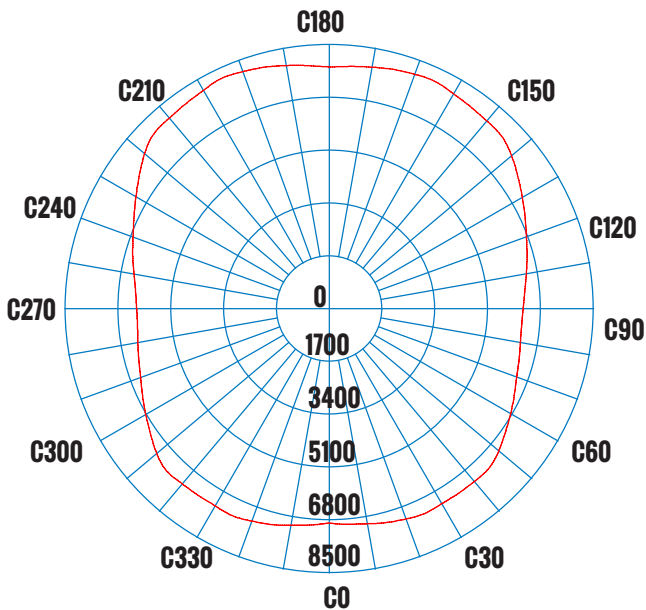





HOUSE SIDE MAX γ = 53.5 DEG STREET SIDE





LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

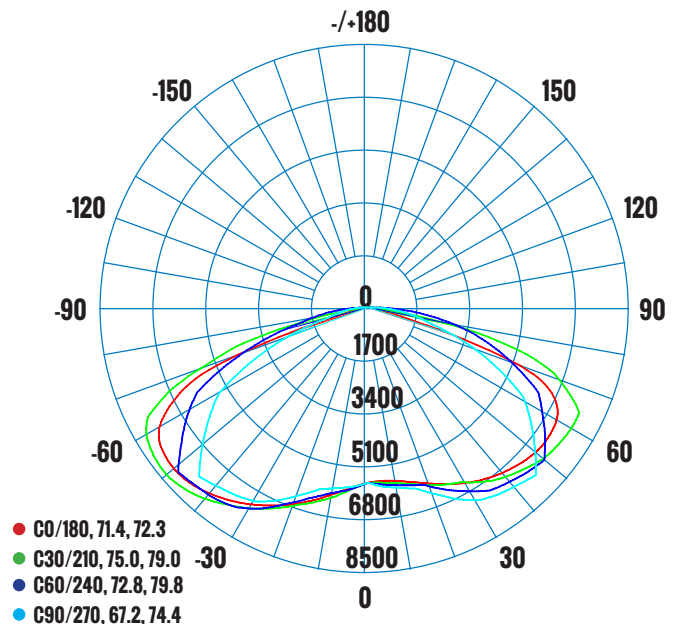

AVERAGE BEAM ANGLE(50%) - 148.0 DEG

PRODUCT CODE: FLH5S-M300WC0-5-PBS-DB
MULTI-WATTAGE COLOR SELECTABLE LED FLOOD LIGHT

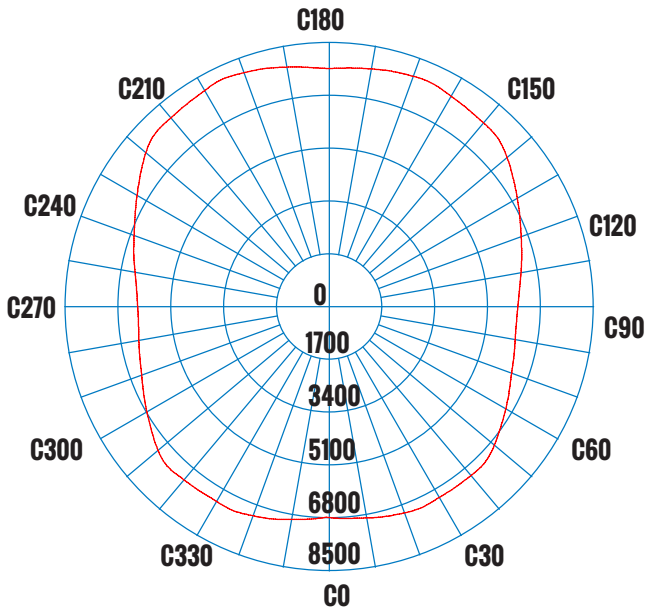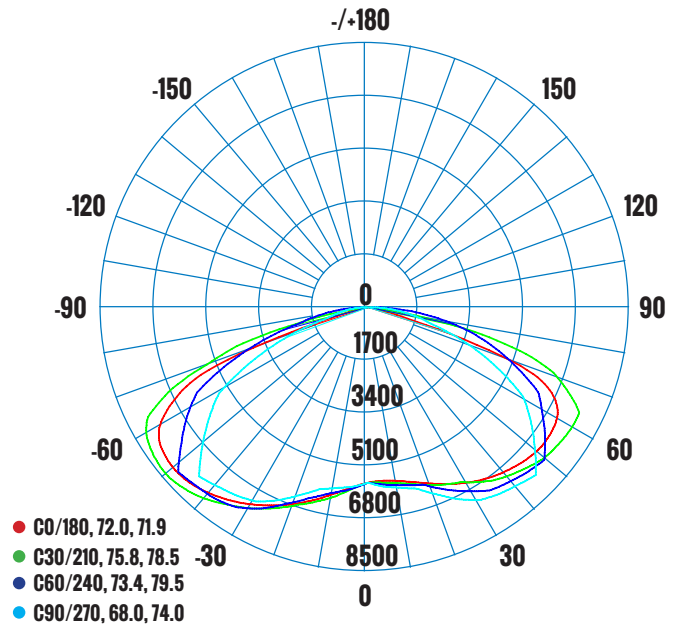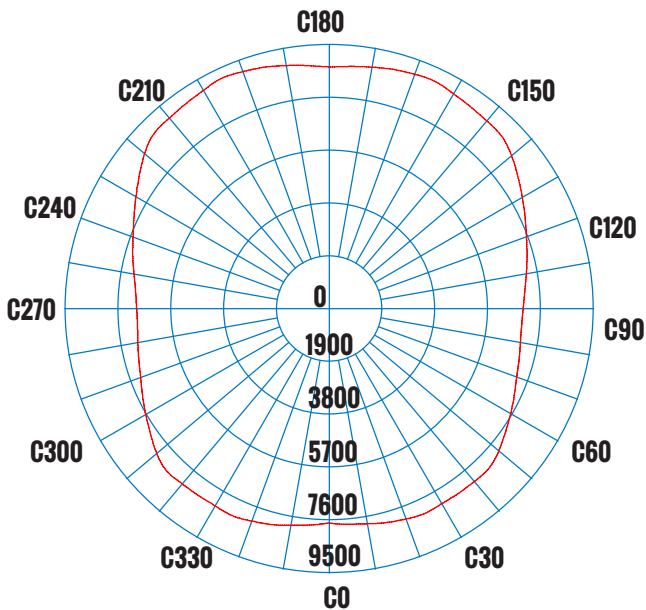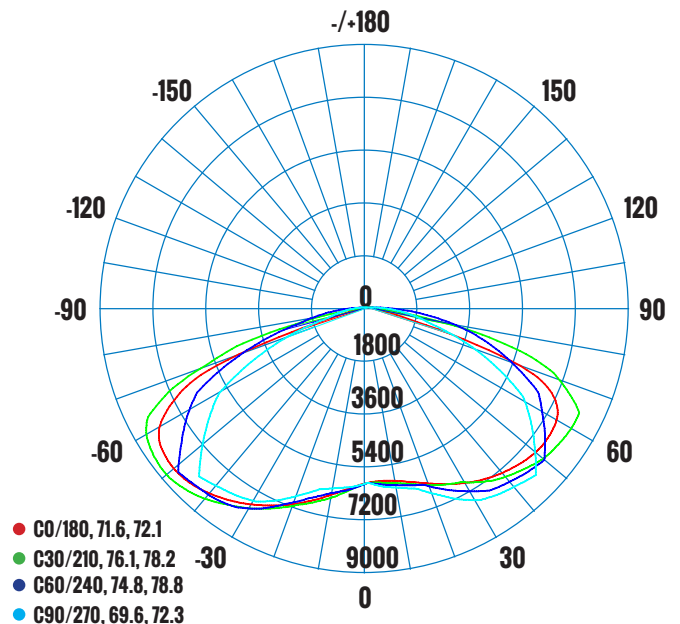LUMINAIRE PHOTOMETRIC (TEST REPORT) - 200W 5000K
MAX INTENSITY CONE SURFACE DISTRIBUTION DIAGRAM

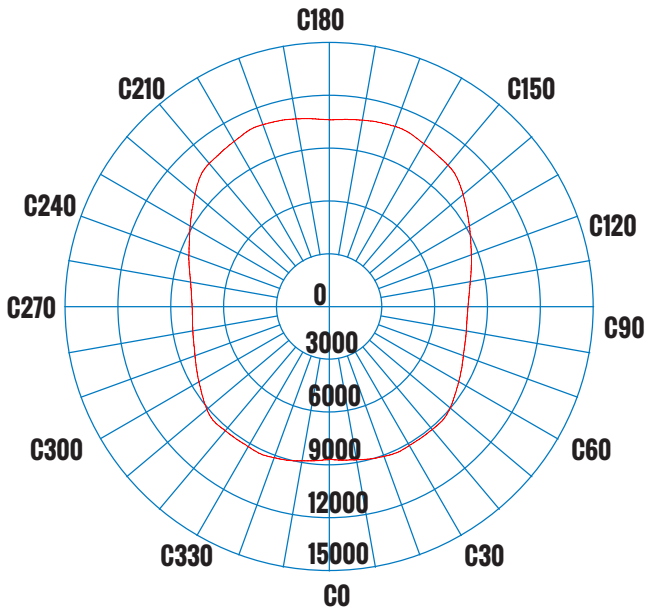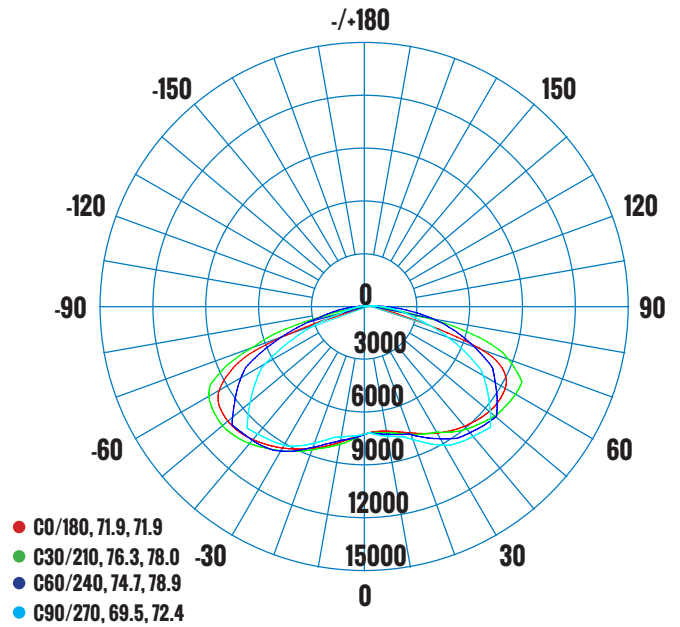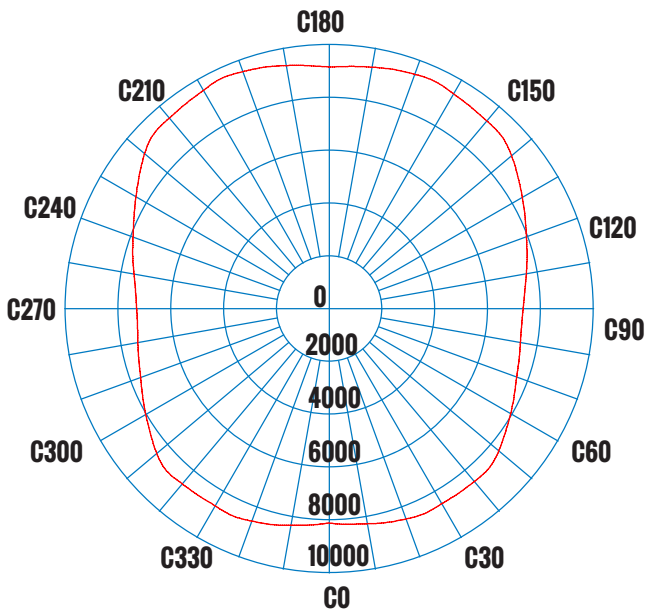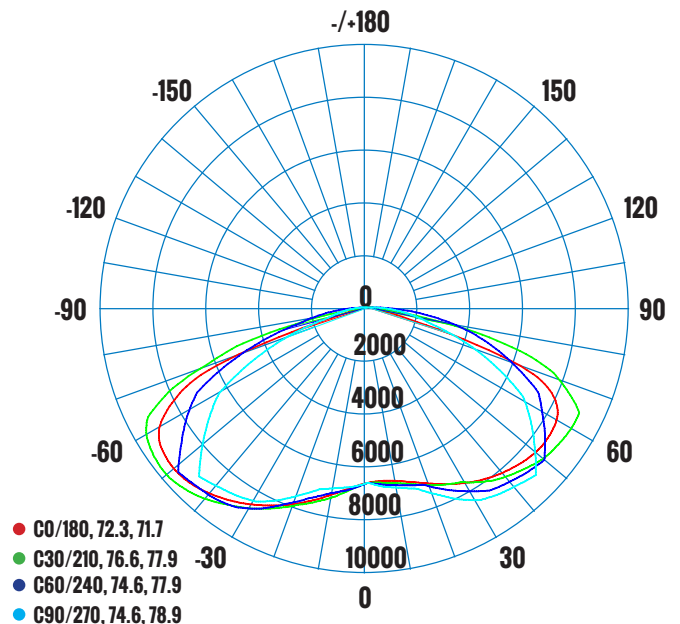HOUSE SIDE MAX γ = 53.5 DEG STREET SIDE
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

LUMINAIRE PHOTOMETRIC (TEST REPORT) - 250W 3000K
MAX INTENSITY CONE SURFACE DISTRIBUTION DIAGRAM

HOUSE SIDE MAX γ = 53.5 DEG STREET SIDE
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM


LUMINAIRE PHOTOMETRIC (TEST REPORT) - 250W 4000K
MAX INTENSITY CONE SURFACE DISTRIBUTION DIAGRAM

HOUSE SIDE MAX γ = 53.5 DEG STREET SIDE
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 148.4 DEG
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 250W 5000K
MAX INTENSITY CONE SURFACE DISTRIBUTION DIAGRAM

HOUSE SIDE MAX γ = 53.5 DEG STREET SIDE
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 148.5 DEG


PRODUCT CODE: FLH5S-M300WC0-5-PBS-DB

MULTI-WATTAGE COLOR SELECTABLE LED FLOOD LIGHT




LUMINAIRE PHOTOMETRIC (TEST REPORT) - 300W 3000K

MAX INTENSITY CONE SURFACE DISTRIBUTION DIAGRAM

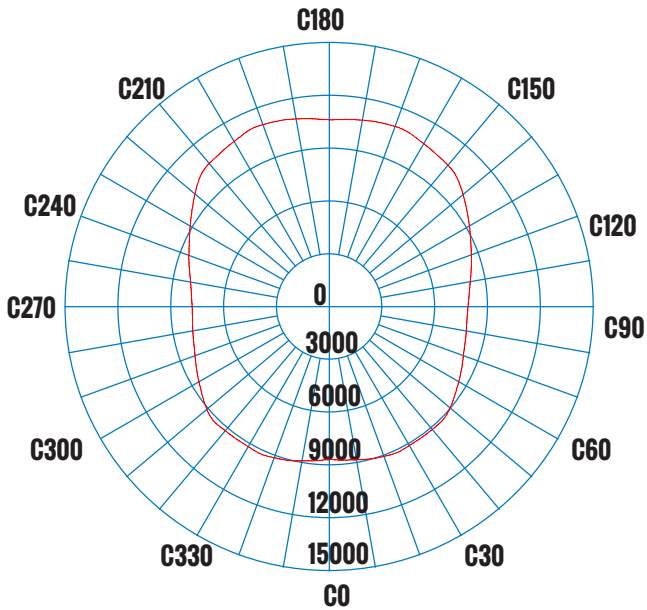

HOUSE SIDE MAX $\gamma = 54.0$ DEG STREET SIDE


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

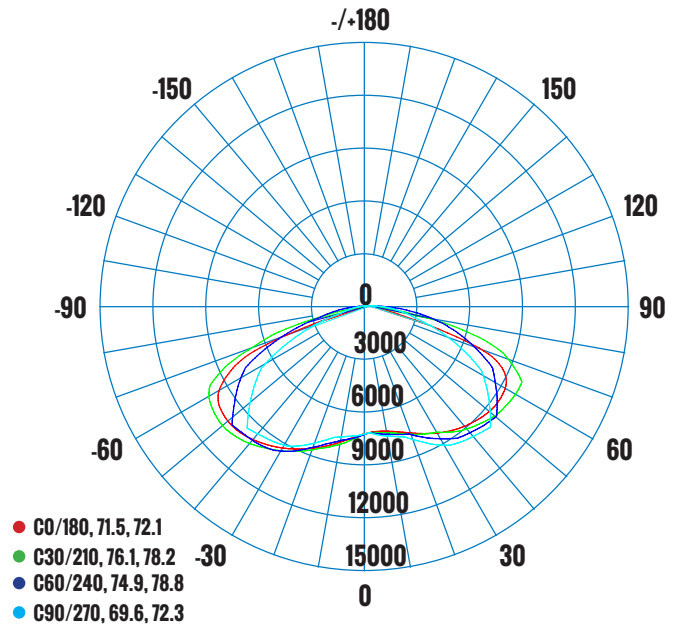

AVERAGE BEAM ANGLE(50%) - 148.4 DEG


LUMINAIRE PHOTOMETRIC (TEST REPORT) - 300W 4000K

MAX INTENSITY CONE SURFACE DISTRIBUTION DIAGRAM

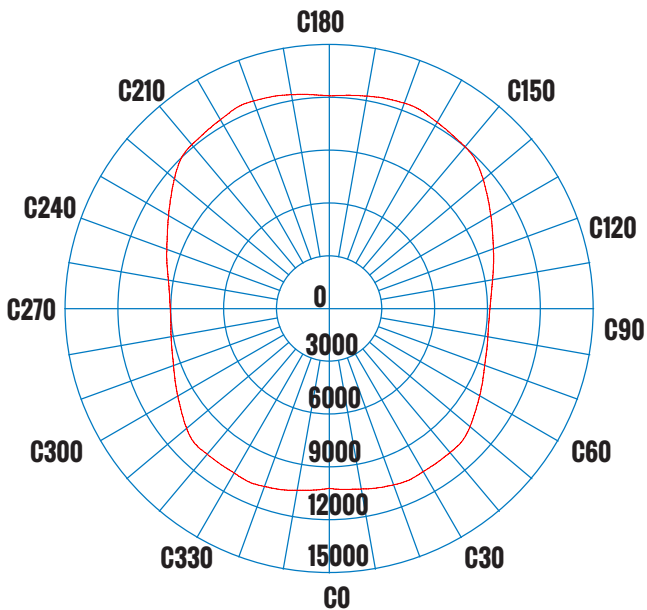

HOUSE SIDE MAX $\gamma = 54.0$ DEG STREET SIDE

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

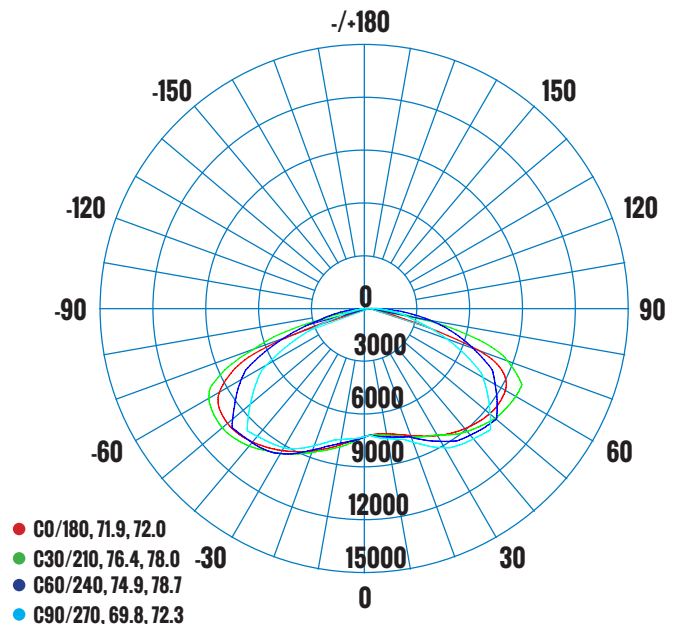


AVERAGE BEAM ANGLE(50%) - 148.5 DEG




LUMINAIRE PHOTOMETRIC (TEST REPORT) - 300W 5000K

MAX INTENSITY CONE SURFACE DISTRIBUTION DIAGRAM

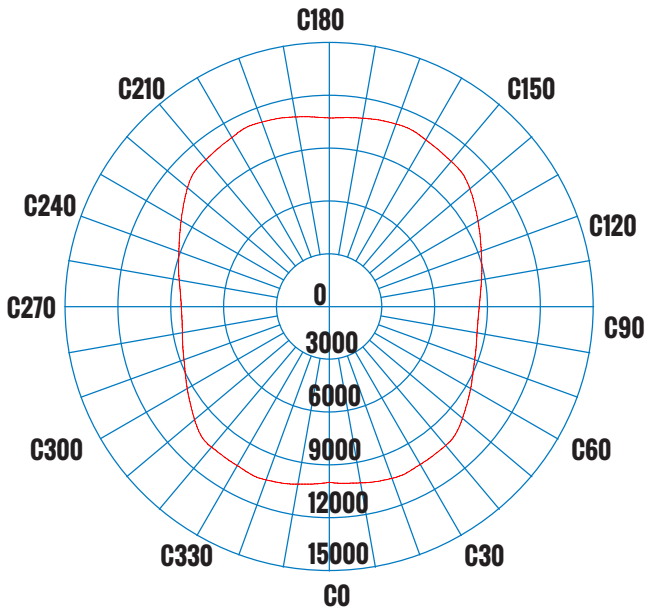

HOUSE SIDE MAX $\gamma = 54.0$ DEG STREET SIDE

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

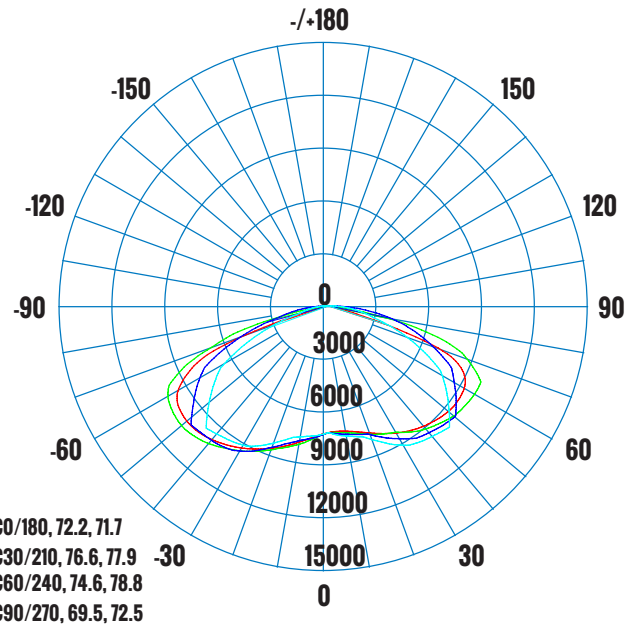

AVERAGE BEAM ANGLE(50%) - 148.5 DEG








CERTIFICATIONS



CAN ICES-005 (B) / NMB-005 (B)

DRIVER/LED CHIP

MOUNTING / SENSOR CONTROL OPTIONS/ACCESSORIES

 FLH5S-M-RC REMOTE CONTROL FOR FLH5S-M-SENMC-12V	 FLH5S-M-SENMC-12V DC MICROWAVE MOTION SENSOR 12V / 0-10V DIM	 FLH5S-M-SENPC-W PHOTOCELL SENSOR 120-347V	 FLH5S-M-TR TRUNNION MOUNT	 FLH5S-M-UM UNIVERSAL MOUNT ROUND OR SQUARE POLE	 FLH5S-M300-YK YOKE MOUNT	 FLH5S-M300-LENS2 - NEMA TYPE II LENS FLH5S-M300-LENS3 - NEMA TYPE III LENS FLH5S-M300-LENS4 - NEMA TYPE IV LENS
--	--	--	--	---	--	--

ORDERING INFORMATION - FLH5S SERIES

SERIES	MULTI-WATTAGE	VOLTAGE	COLOR TEMPERATURE	BEAM	SENSOR BASE	FINISH
E.G. FLH5S	M300	W	C	5	PBS	DB
FL - FLOOD LIGHT	M300 - MULTI-WATTAGE -	W - 120-347V	C - 3CCT -	5 - TYPE 5 BEAM	PBS - PHOTOCELL BASE	DB - DARK BRONZE
HIGH WATTAGE	200W / 250W / 300W		3000K, 4000K, 5000K		WITH SHORTING CAP	
SLIM	300W MAX					

Head Office - 1850 Wilson Ave. - Toronto, ON - M9M 1A1 - Tel: 416.741.7336 - Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 - in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com - For sales/service questions - sales@etlin.com